
UI Profile Editor

A complete walkthrough of the interactive prototype: every region, widget and interaction, with screenshots of each state.

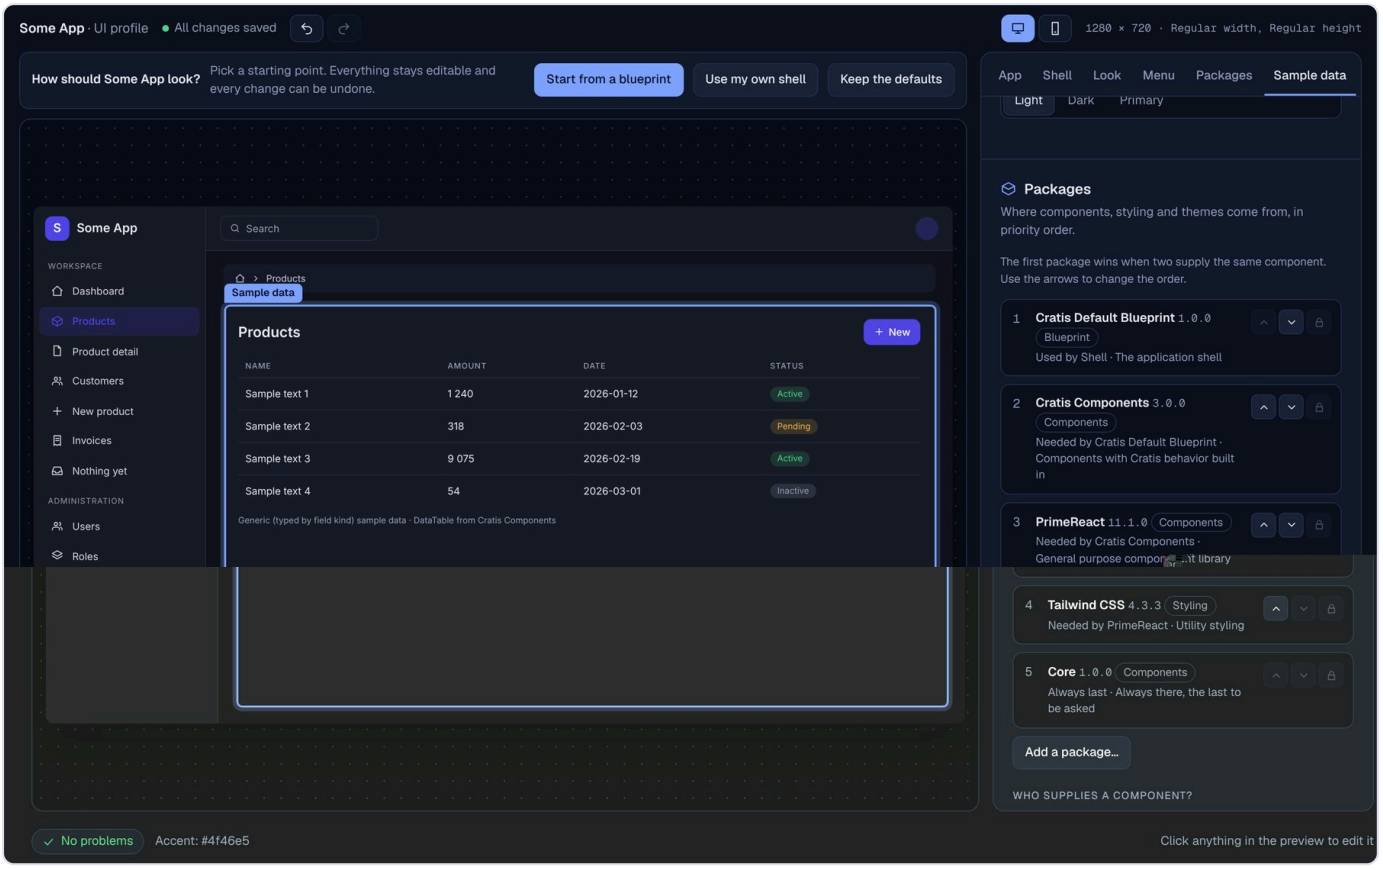

17 October 2026 · Prototype v4 · Screenshots captured from the running prototype at 1440 × 900

Contents

1 What was wrong, and the idea behind the prototype

2 The editor at a glance

3 Preview and inspector are one thing: hover, click, scroll

4 Starting point: the starter bar

5 App (name and logo) and Shell sections

6 Look section: scheme, theme, accent, font, corners

7 Menu section: eight modes and three menu themes

8 Packages section: order, dependencies and who supplies what

9 Sample data section

10 Problems panel and status bar

11 Device preview, undo/redo, keyboard, light and dark Studio

12 Widget reference: every control in one table

13 Rules the prototype enforces

14 What this is not yet, and open questions

1. What was wrong, and the idea behind the prototype

The existing UI profile editor asks you to hold two models at once. You pick an item in a tree on the left, its values appear in a panel on the right, and a third surface, a cogwheel on the preview, opens yet another properties sidebar. There is no visible link between what you click and what changes, and the three surfaces disagree about where settings live.

The prototype replaces that with one idea: **the preview is the navigation**. You point at the thing you want to change and a single scrolling inspector takes you to its settings. Everything applies live and every change can be undone.

BEFORE	NOW
Tree on the left selects what to edit	Click the thing in the preview, or use the tabs at the top of the inspector
Values on the right for the selected node only	One scrolling inspector with six sections; you see neighbours and can scroll
Cogwheel on the preview opens a second properties sidebar	No second sidebar. Clicking a region highlights it and scrolls the inspector to it
Free-text for enumerated values (for example “static”)	Visual pickers: schematics for menu modes, thumbnails for blueprints, swatches for accents
Packages as a flat list	Ordered list with reasons, locks, dependencies and a “who supplies a component?” table
Problems hidden in a separate tab	Problems chip in the status bar with one-click fixes

> **How it was built.** One self-contained HTML page with plain JavaScript and no framework. All settings live in one state object; every change goes through one function that records an undo step and re-renders the preview and inspector. It is published as a private artifact. The screenshots in this document were captured from that same page in a headless browser, so they show real behavior, not mock-ups.

2. The editor at a glance

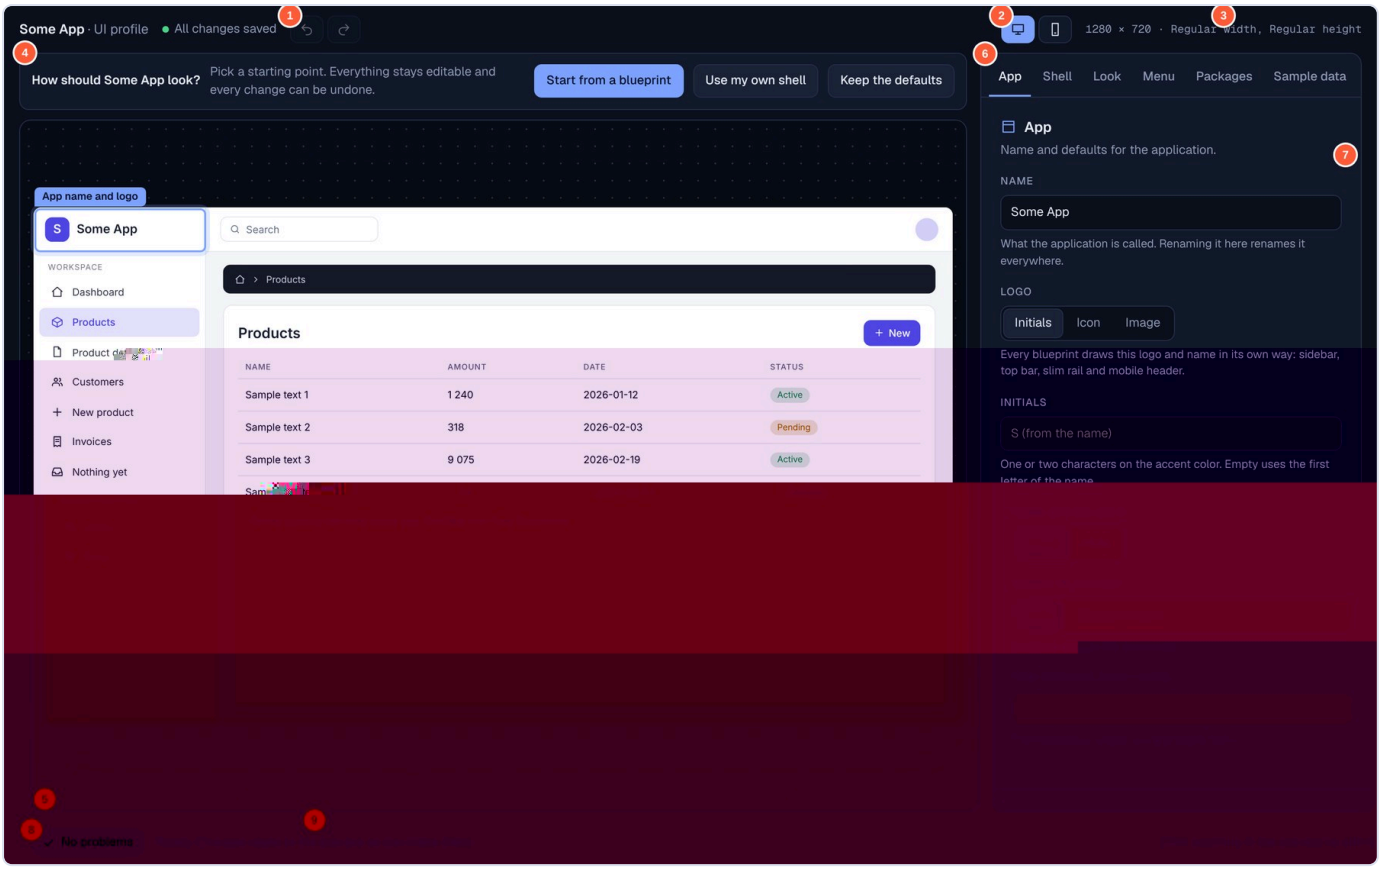


Figure 1. The editor in its starting state. Numbered markers are explained in the table below.

#	ELEMENT	WHAT IT DOES
1	**Undo / Redo**	Steps back and forward through every change. Disabled when there is nothing to undo or redo. Also available as `Ctrl/⌘ Z` and `Ctrl/⌘ Shift Z`.
2	**Device toggle**	Switches the preview between desktop (1280 × 720) and mobile (390 × 800). The active device is filled blue.
3	**Size readout**	Shows the logical size and size class of the preview, for example “1280 × 720 · Regular width, Regular height”.
4	**Starter bar**	Shown until you choose a starting point. Three buttons: Start from a blueprint, Use my own shell, Keep the defaults.
5	**Preview stage**	The live application, scaled to fit. It is interactive: hover, click, open menus, switch screens.
6	**Section tabs**	App, Shell, Look, Menu, Packages, Sample data. They jump to a section and follow your scroll position.
7	**Inspector**	One scrolling column holding every setting, in the same order as the tabs.
8	**Problems chip**	Green “No problems”, or amber with a count. Click it to open the problems panel.
9	**Status message**	Says what the last change was, for example “Menu mode: Slim”, “Undid: …” or a hint

3. Preview and inspector are one thing

Three interactions tie the preview to the inspector. Together they remove the “select on the left, edit on the right” problem.

Hover shows what you are about to edit

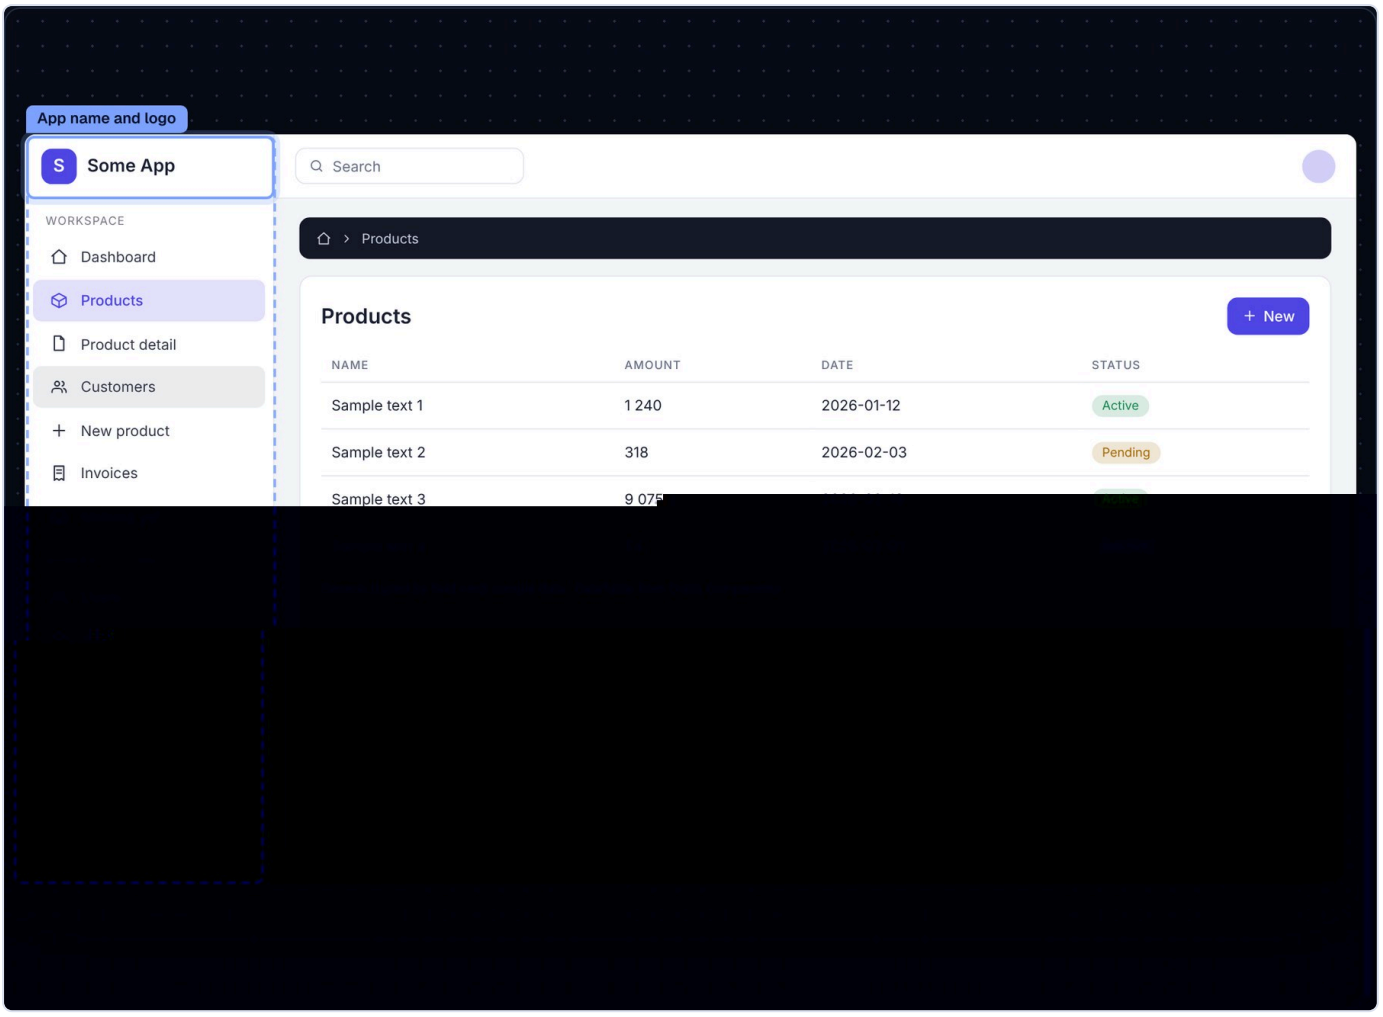


Figure 2. Hovering the sidebar draws a dashed outline and a label (“Menu”). Nothing changes until you click.

Click selects and scrolls

Clicking any region draws a solid outline with a glow and the same label, scrolls the inspector to the matching section, and flashes that section briefly so your eye finds it. The matching tab is underlined.

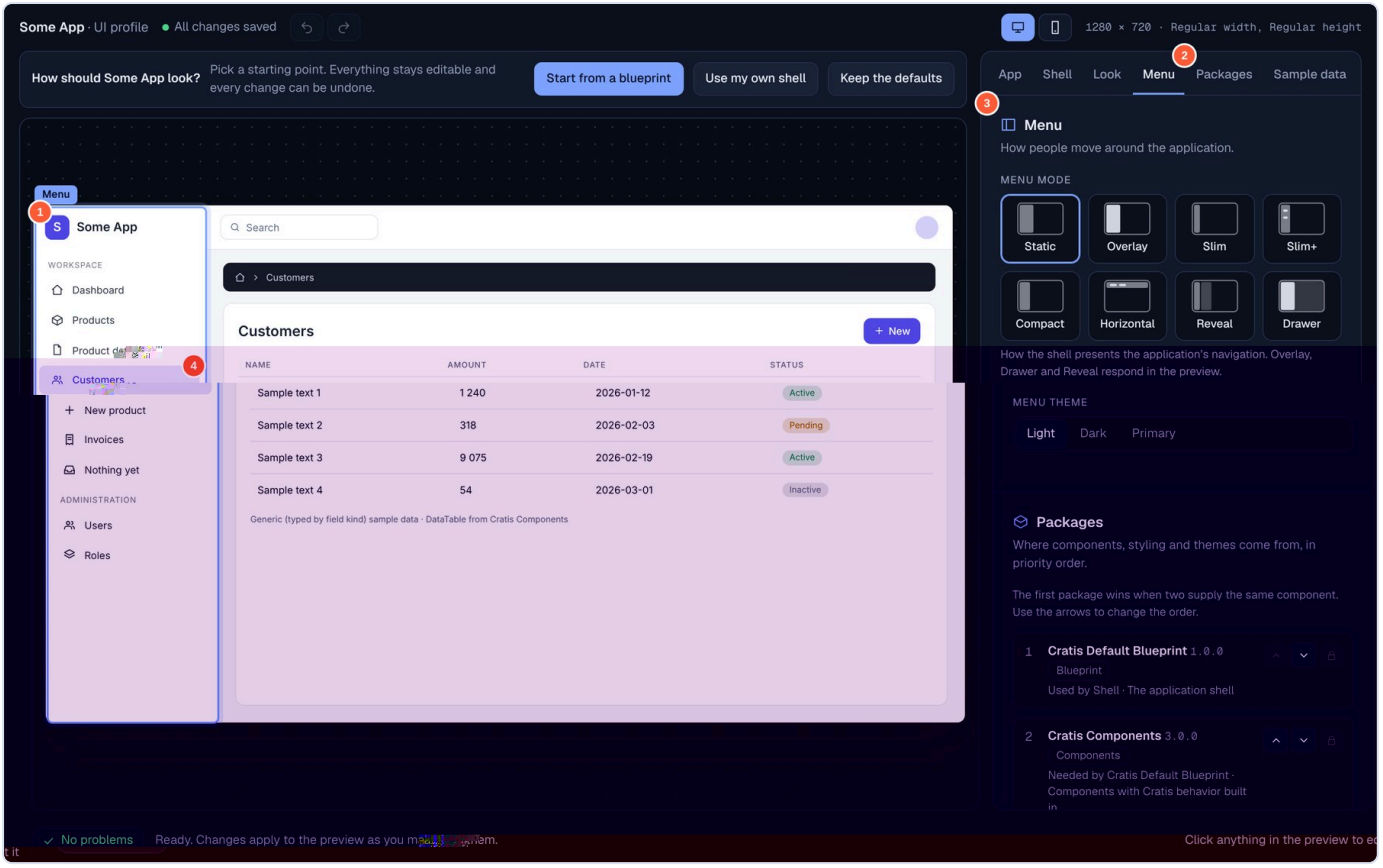


Figure 3. After clicking “Customers” in the sidebar. 1 the solid outline on the menu, 2 the Menu tab is underlined, 3 the inspector has scrolled to the Menu section, 4 the screen switched to Customers.

CLICK HERE IN THE PREVIEW	LABEL	INSPECTOR GOES TO
Logo or app name	App name and logo	App
Top bar (search, avatar, empty space)	Shell	Shell
Sidebar, or the horizontal menu items	Menu	Menu
Content card with the table	Sample data	Sample data
The “New” button	Look and accent	Look
Hamburger button	(no selection)	Only opens or closes the menu in Overlay, Drawer and mobile modes
A menu item such as “Customers”	Menu	Menu, and the screen title and breadcrumb change to that item

It works in the other direction too. Scrolling the inspector, or clicking a tab, moves the solid outline in the preview to the region that section controls. Packages has no region in the preview, so the outline disappears there. Scrolling to the very bottom always selects Sample data.

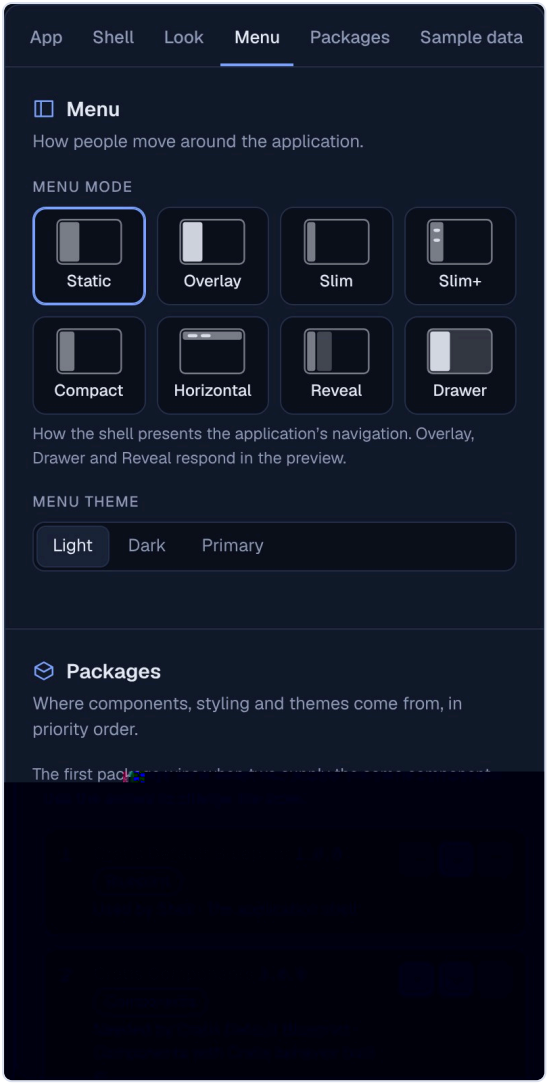


Figure 4. The inspector at the Menu section after the click in Figure 3.

4. Starting point: the starter bar





Figure 5. The starter bar above the preview. It replaces the old “How should Some App look?” card in the middle of the canvas.

BUTTON	RESULT
Start from a blueprint	Hides the bar, scrolls to Shell and flashes it. The status line says “Choose a blueprint in the Shell section”.
Use my own shell	Hides the bar, selects “My own shell” and scrolls to Shell, where a package or path field appears.
Keep the defaults	Hides the bar and leaves the Cratis Default Blueprint in place.

Each choice is recorded in the undo history, so undoing it brings the bar back. The bar also hides itself the first time you choose any blueprint or your own shell directly in the inspector.

5. App and Shell sections

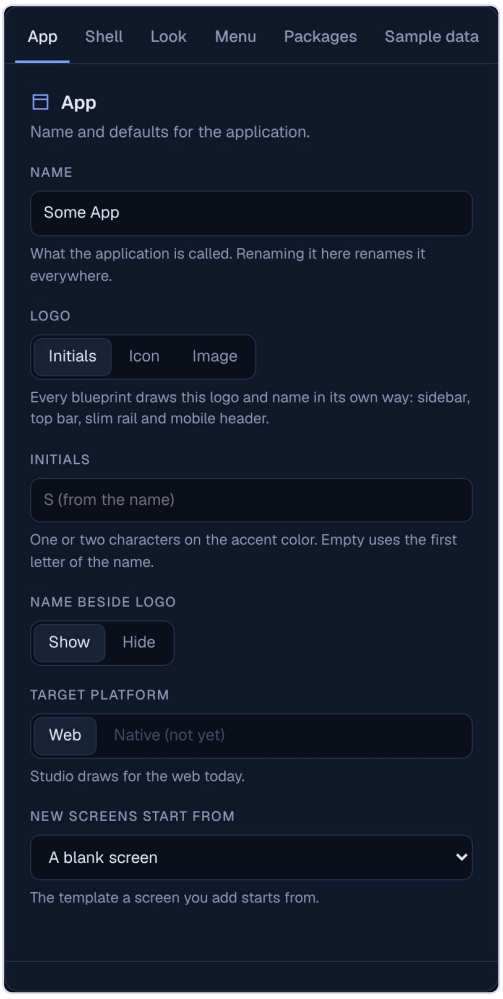


App

Name, logo and defaults for the application.

- **Name** text field. The preview, the editor header and the starter bar update as you type. Typing is merged into one undo step.
- **Logo** segmented control: Initials, Icon or Image. Each shows its own control underneath (next page).
- **Name beside logo**: show or hide the name next to the mark.
- **Target platform** segmented control. “Web” is selected; “Native (not yet)” is disabled.
- **New screens start from** dropdown: a blank screen, a list screen, a form screen or a detail screen.

Each field has one line of help text under it, written for the person editing rather than the system.

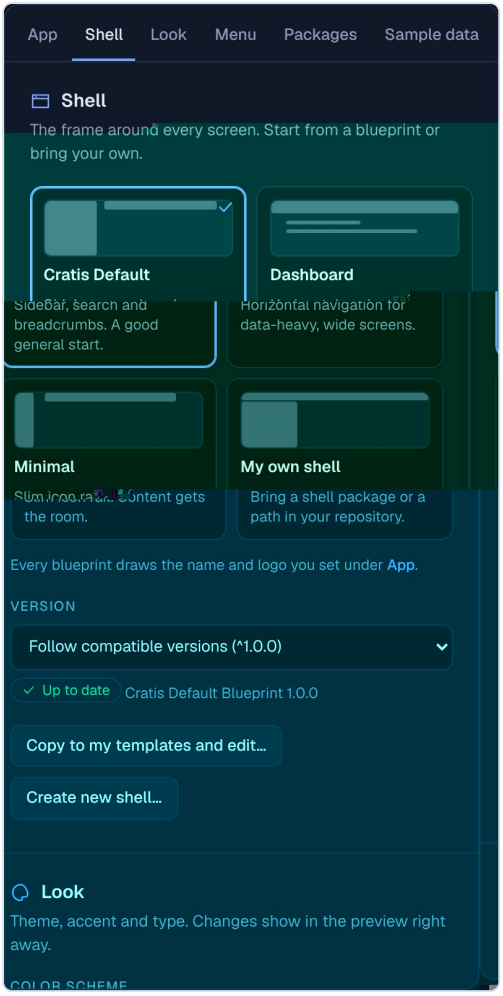

Shell

Four cards, each with a small wireframe: **Cratis Default** (sidebar with search and breadcrumbs), **Dashboard** (horizontal navigation), **Minimal** (slim icon rail) and **My own shell**. The chosen card has a blue border and a check mark.

- Choosing a blueprint swaps the blueprint package in position 1 of Packages and sets the menu mode to the blueprint's default: Static, Horizontal or Slim. The status line says so.
- **Version** dropdown: follow compatible versions (^1.0.0), pin to 1.0.0, or always the latest. A green "Up to date" chip sits under it.
- A note under the cards says every blueprint draws the name and logo from App, with a link back to it.
- **Copy to my templates and edit…** and **Create new shell…** are placeholders. They explain in the status line what they would do.

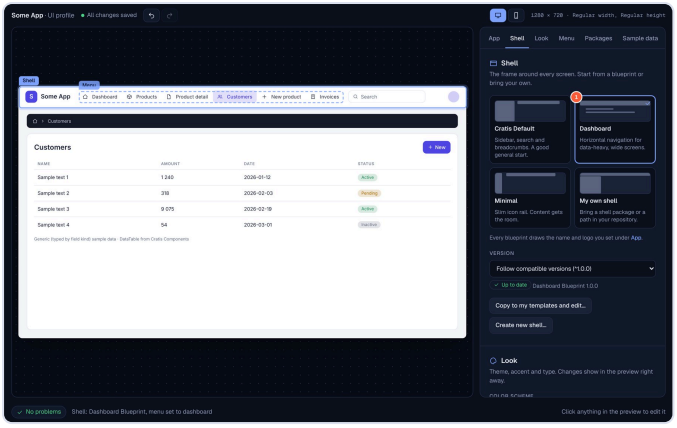


Figure 6. Choosing “Dashboard” (1 the chosen card). The shell becomes a horizontal menu in the top bar and Packages now lists the Dashboard Blueprint first.

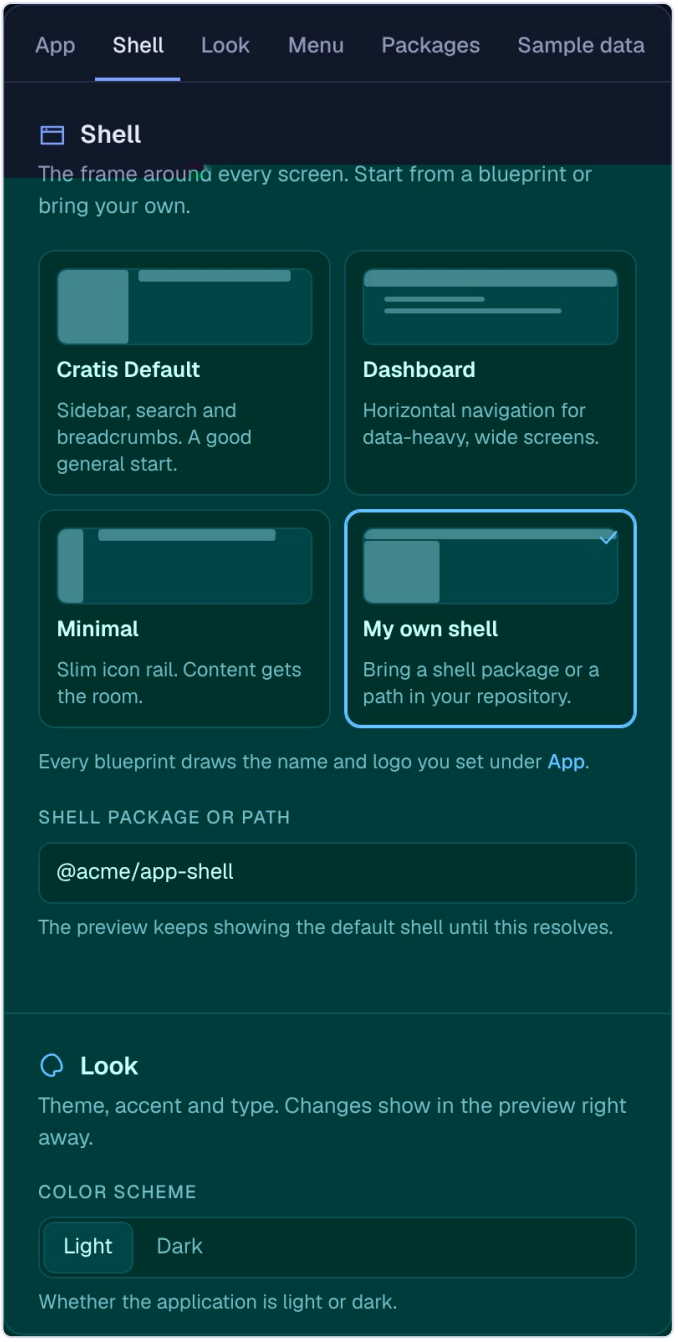


Figure 7. “My own shell” shows a text field for a package name or path. Until it has a value the problems chip raises a warning.

Name and logo, drawn by every blueprint

The app name and logo are set once, under App. The shell blueprint decides how to draw them. Changing the shell or the menu mode never changes the name or logo, and changing them updates every blueprint at once.

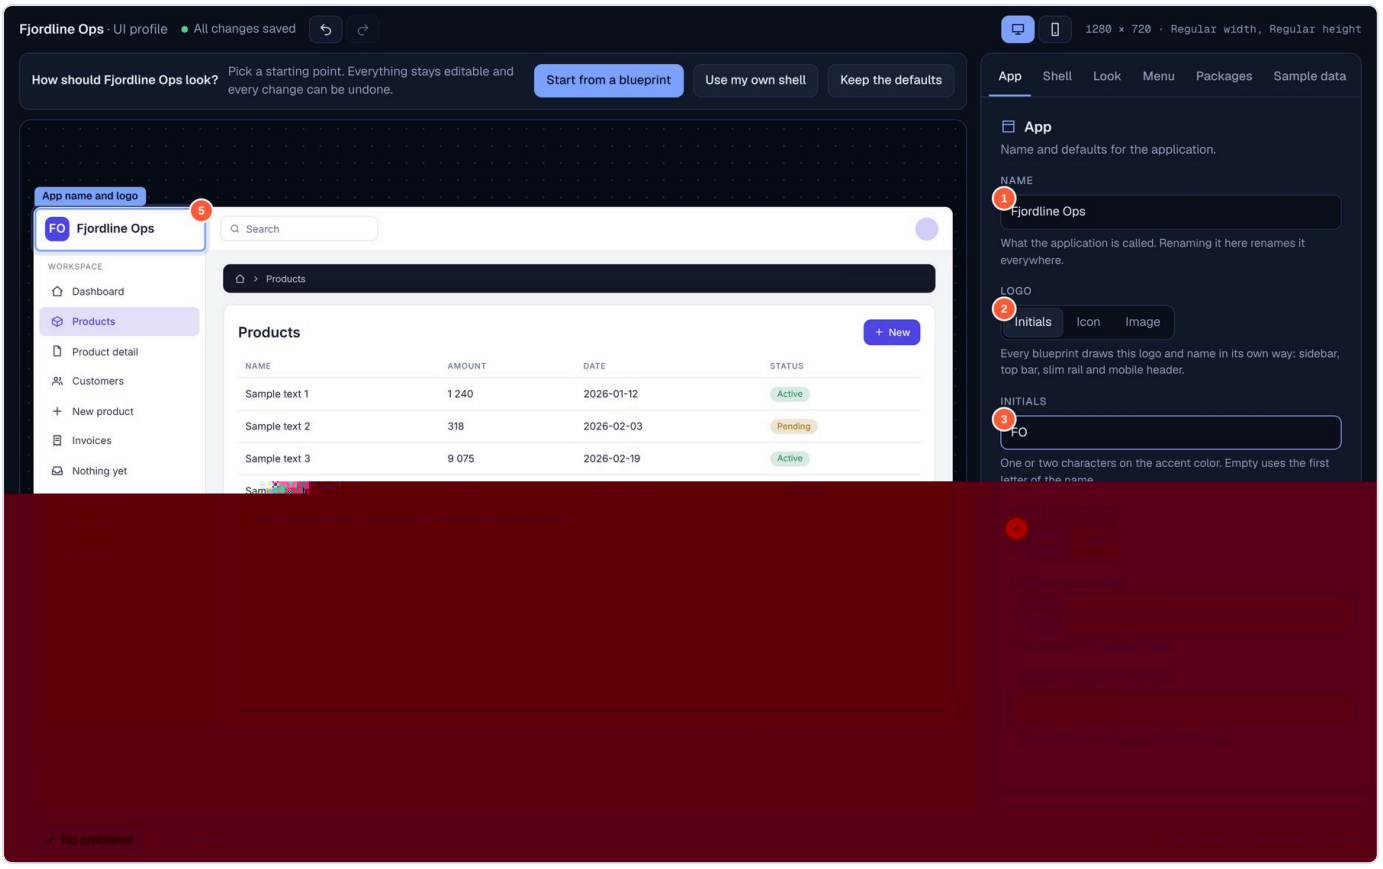


Figure 8. Initials logo. 1 name field, 2 logo type, 3 initials field, 4 name beside logo, 5 the result in the preview. The editor header and starter bar now say “Fjordline Ops” as well.

LOGO TYPE	CONTROL	BEHAVIOR
Initials	Text field, up to two characters	Characters on a block in the accent color. Empty uses the first letter of the name; the field’s placeholder shows which letter that is.
Icon	Grid of eight icons	An icon on the accent block. The chosen icon has a blue border.
Image	Choose image…, Use sample logo, Remove	Your own image, shown without the accent block. PNG, JPG, SVG or WebP up to 400 KB. A small thumbnail appears beside the buttons. “Use sample logo” loads a built-in mark so you can try it without a file.

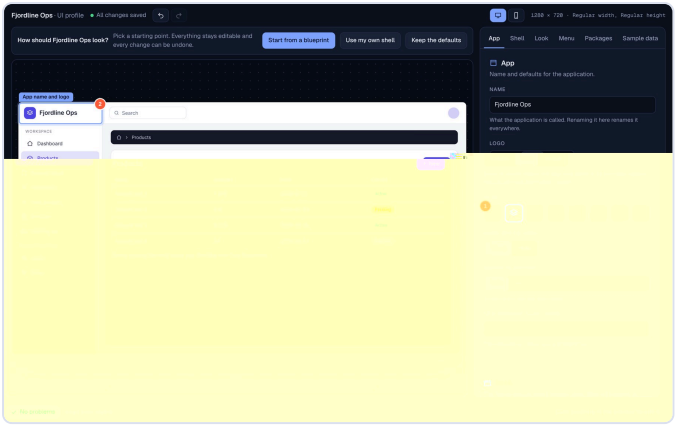


Figure 9. Icon logo. 1 icon grid, 2 the icon in the preview.

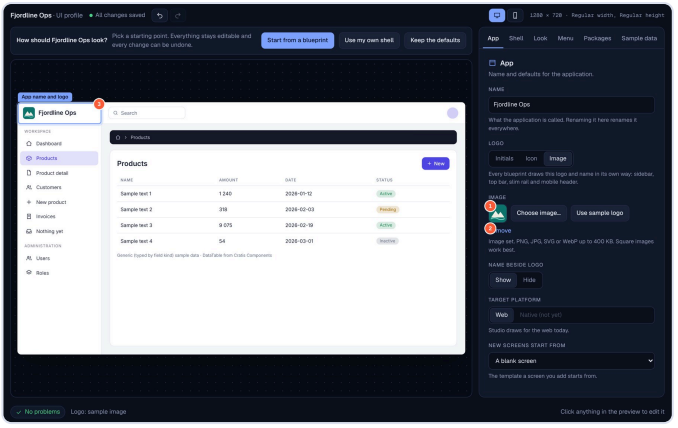


Figure 10. Image logo. 1 thumbnail, 2 Remove, 3 the image in the preview.

Where the name and logo appear

MENU MODE	HOW IT IS DRAWN
Static, Compact	Logo and name at the top of the sidebar.
Slim, Slim+, Reveal (collapsed)	Logo mark only. The name returns when Reveal expands on hover.
Horizontal	Logo and name at the left end of the top bar.
Overlay, Drawer	In the top bar next to the hamburger, and again in the menu panel when it is open.
Mobile preview	In the top bar next to the hamburger, and in the drawer.

Clicking the logo or name in the preview selects “App name and logo” and scrolls the inspector to App.

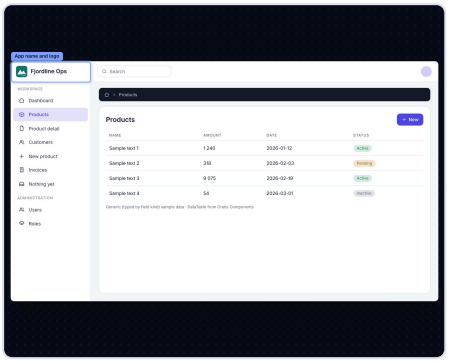


Figure 11. Cratis Default: sidebar header.

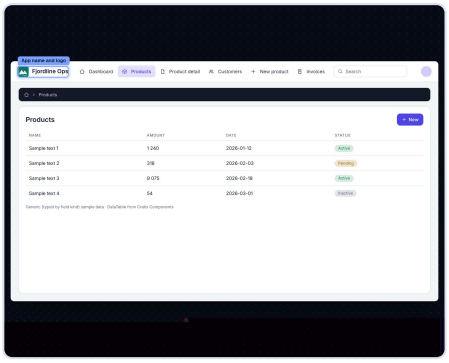


Figure 12. Dashboard: left end of the top bar.

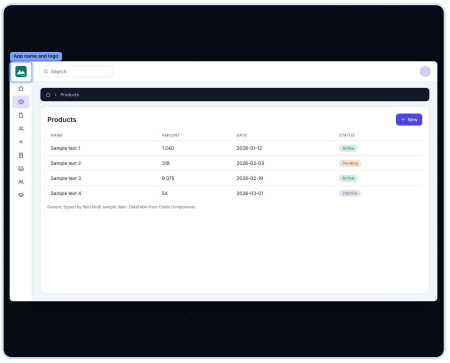


Figure 13. Minimal: mark only in the slim rail.

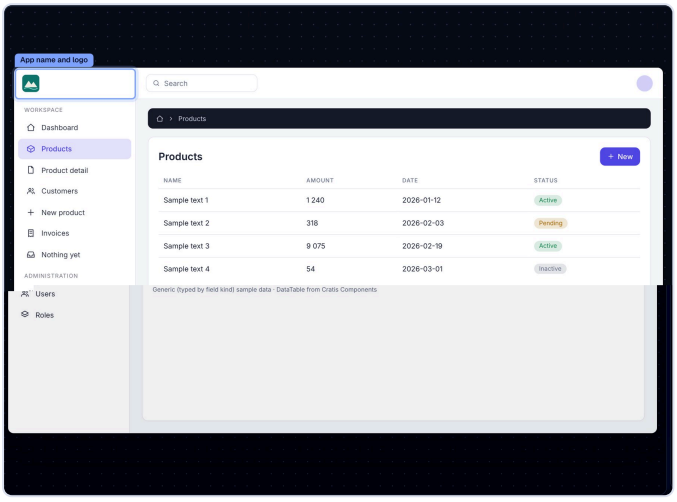


Figure 14. Name beside logo set to Hide. Only the mark remains.

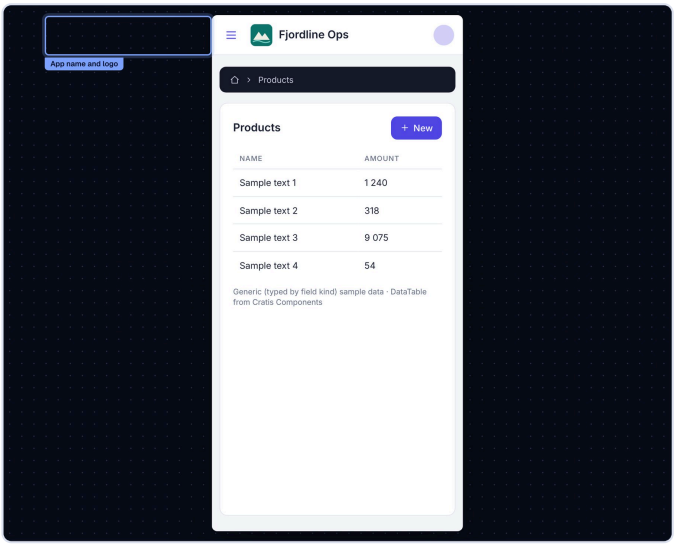


Figure 15. Mobile preview with the logo and name in the header.

A problem the logo can raise


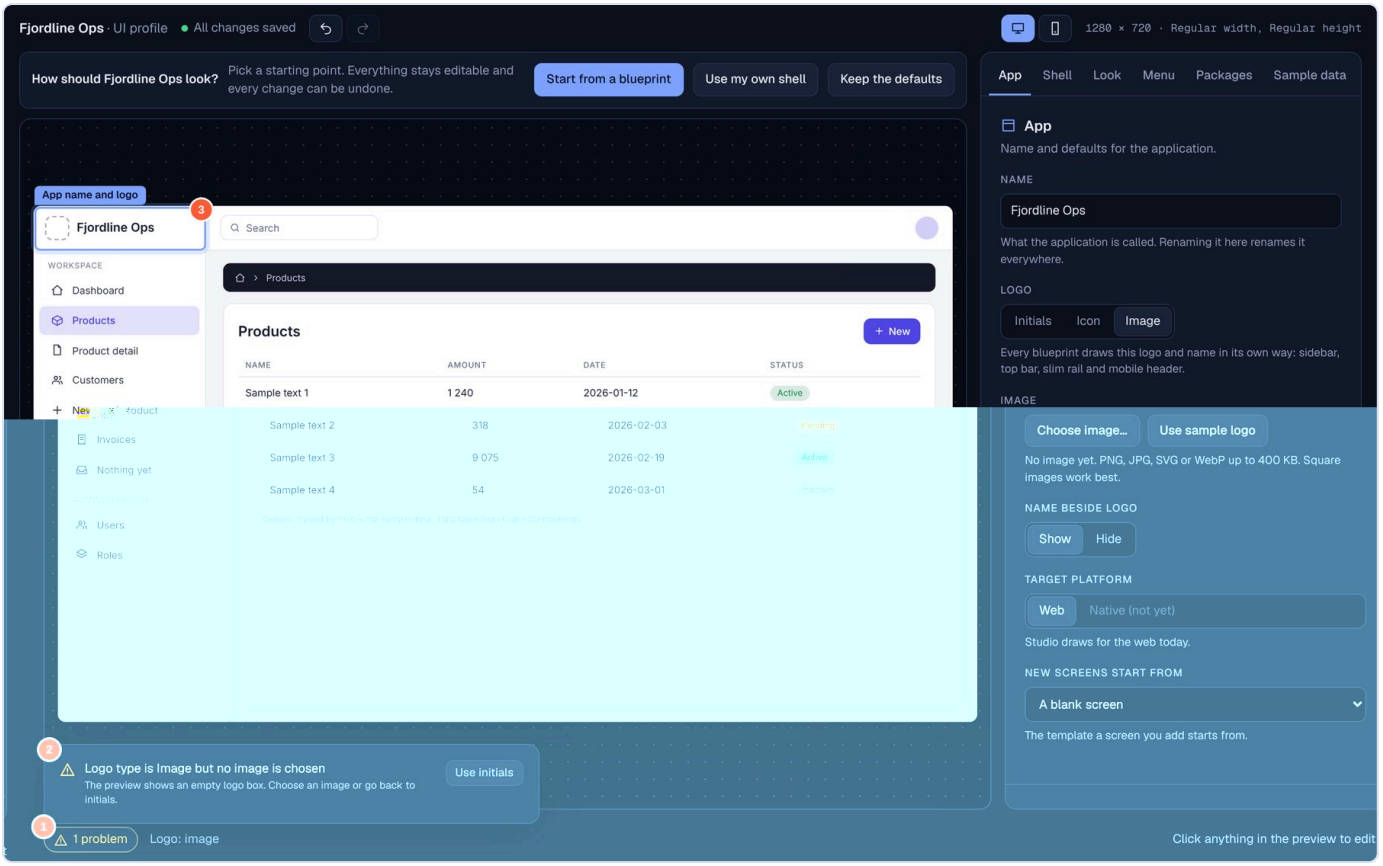


Figure 16. Logo type is Image but no image is chosen. 1 problems chip, 2 the panel with its “Use initials” fix, 3 the empty dashed box where the logo should be.

6. Look section


Theme, accent and type. Every control changes the preview immediately.

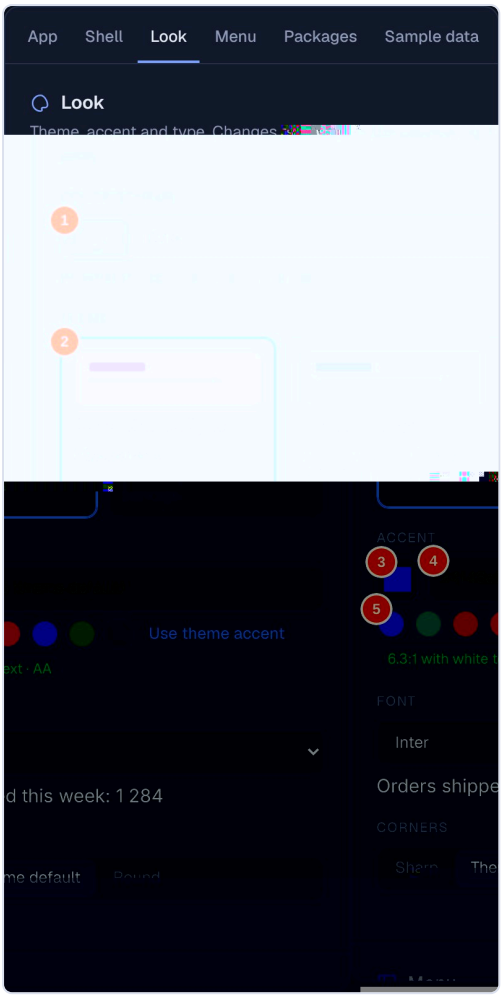

Scheme, theme and accent

- **Color scheme** (Light / Dark). Switching it picks the matching Scene Default theme if the current theme does not fit.
- **Theme** cards, filtered by scheme. Material themes are dimmed with the note “Needs Material Themes. Selecting it adds the package.” Selecting one adds that package, and anything it depends on, to Packages.
- **Accent**: a colour picker, a hex field whose placeholder shows the theme default, seven swatches and a “Use theme accent” link. Picker drags are merged into one undo step.
- **Contrast chip** under the accent shows the ratio against white button text and a grade: AAA, AA, large text only, or fails. It is green, amber or red.

Markers on the screenshot: 1 color scheme, 2 theme cards, 3 colour picker, 4 hex field, 5 swatches.

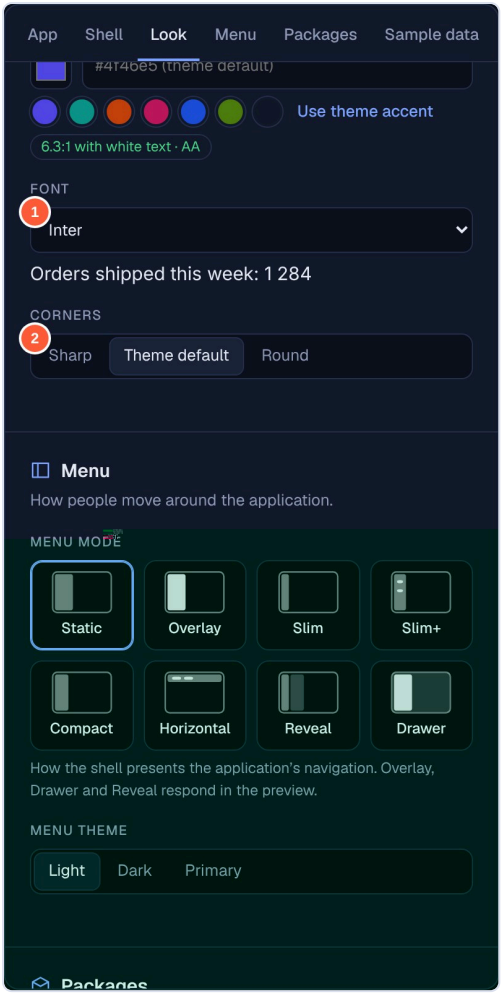

Font and corners

- **Font** dropdown: Inter, IBM Plex Sans, Source Serif 4, System UI. A sample line under it is set in the chosen face.
- **Corners**: Sharp (4 px), Theme default, or Round (18 px). It affects buttons, cards, the logo and menu items in the preview.

The sample line reads “Orders shipped this week: 1 284”, so digits and letters show together.

Markers: 1 font dropdown, 2 corners control.

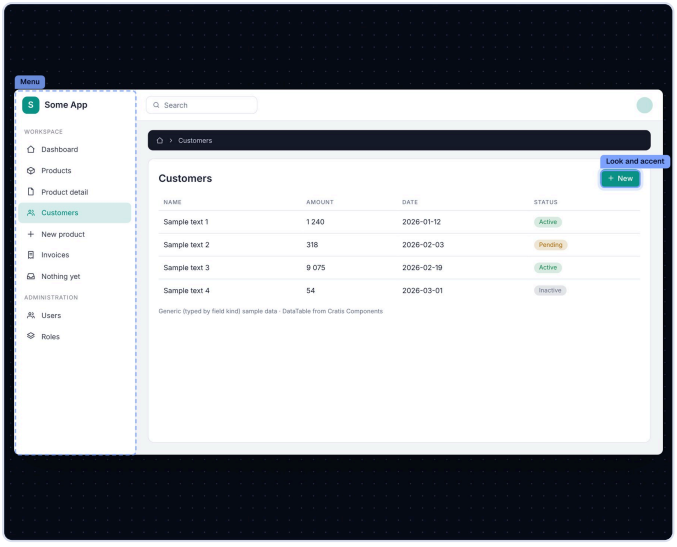


Figure 17. Accent changed to teal. The logo, menu highlight, New button and avatar tint follow at once.

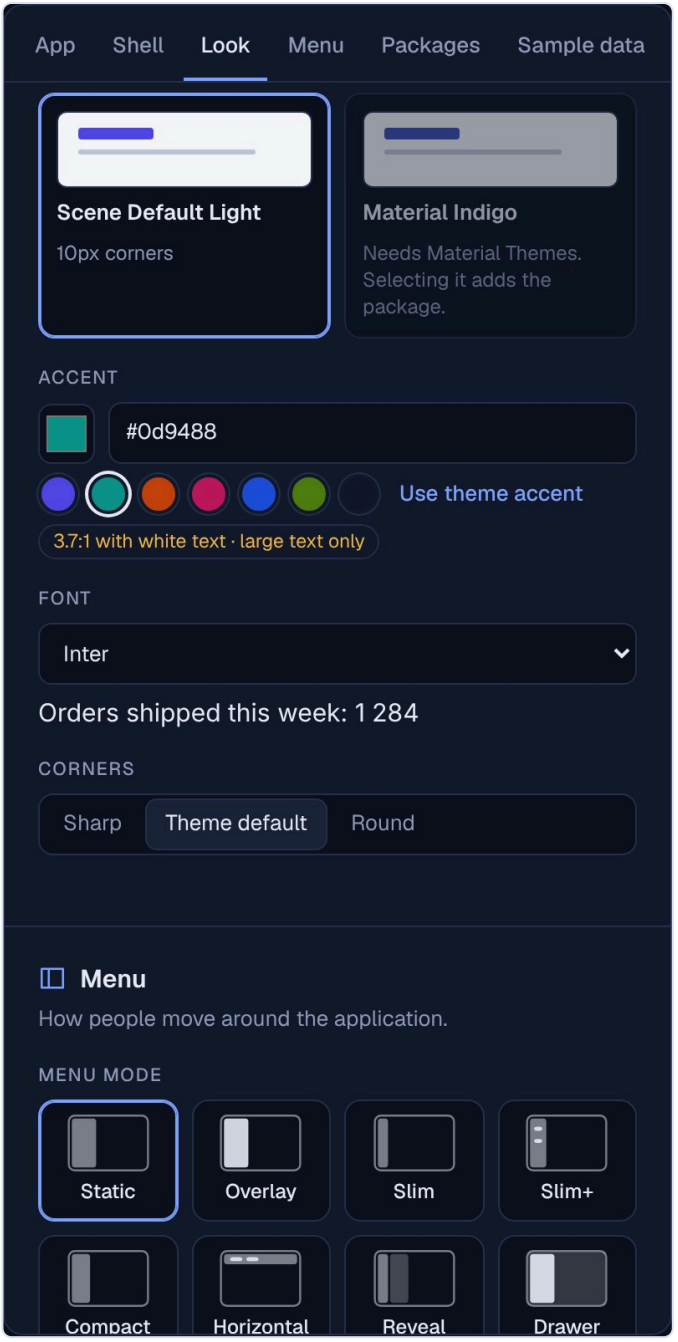


Figure 18. The same change in the inspector. The matching swatch has a white ring.

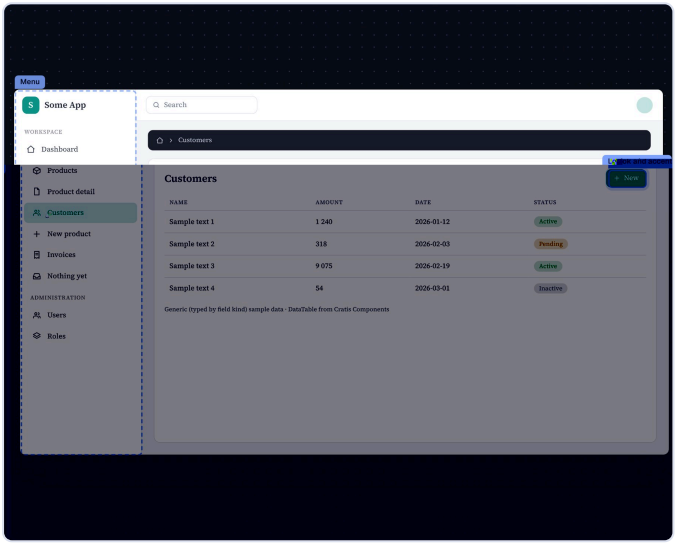


Figure 19. Source Serif 4.

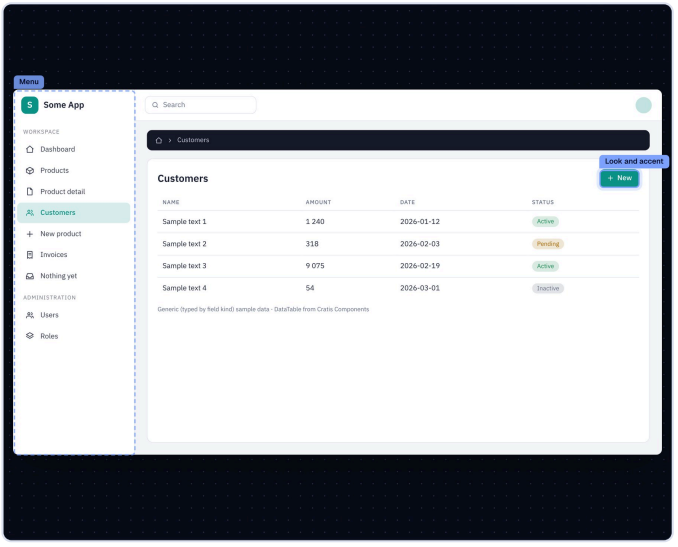


Figure 20. IBM Plex Sans.

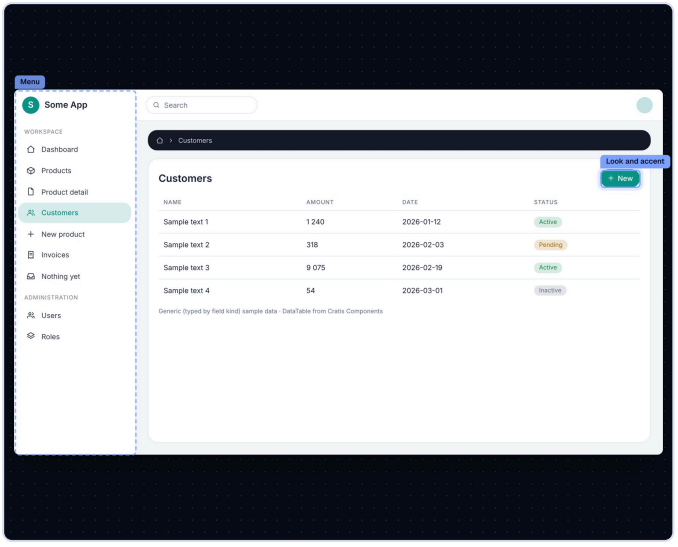


Figure 21. Corners: Round.

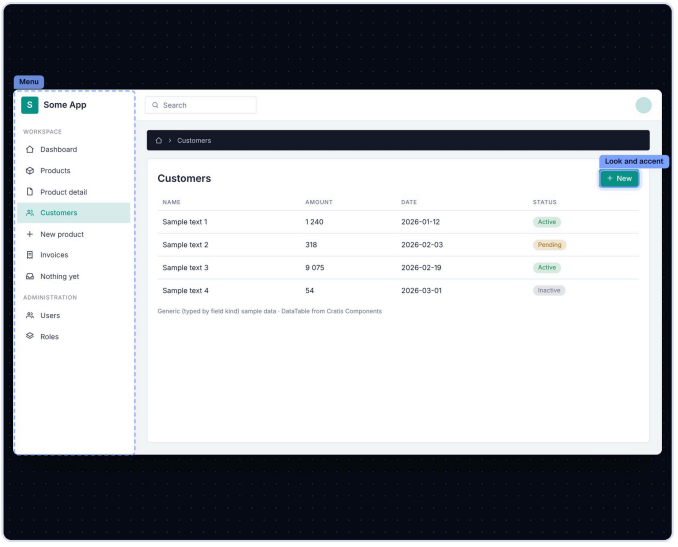


Figure 22. Corners: Sharp.

Dark scheme and Material themes

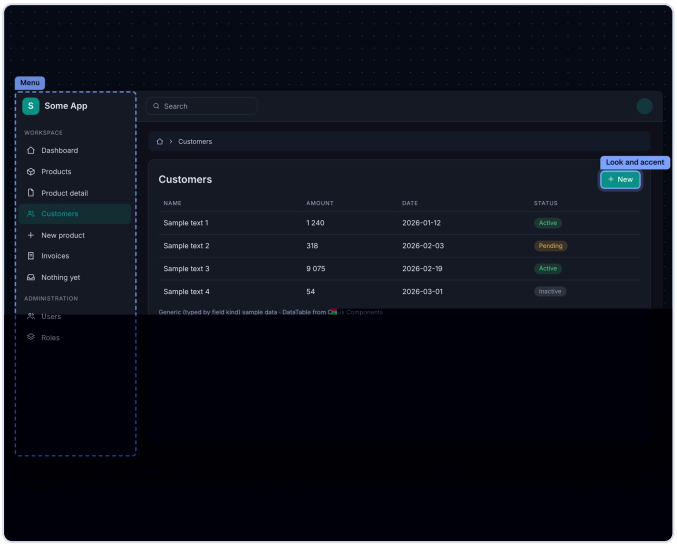


Figure 23. Color scheme set to Dark. The preview application turns dark; the accent lightens to keep contrast.

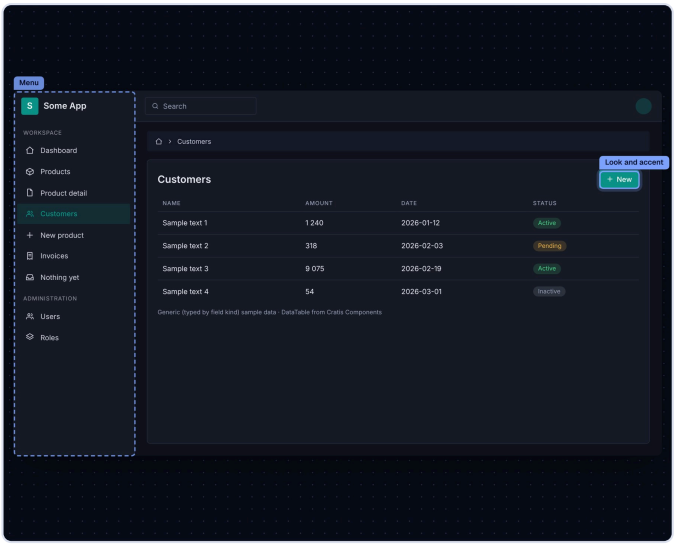


Figure 24. Material Night: 4 px corners and its own accent. Choosing it added the Material Themes package automatically.



Figure 25. Theme list while Dark is selected.


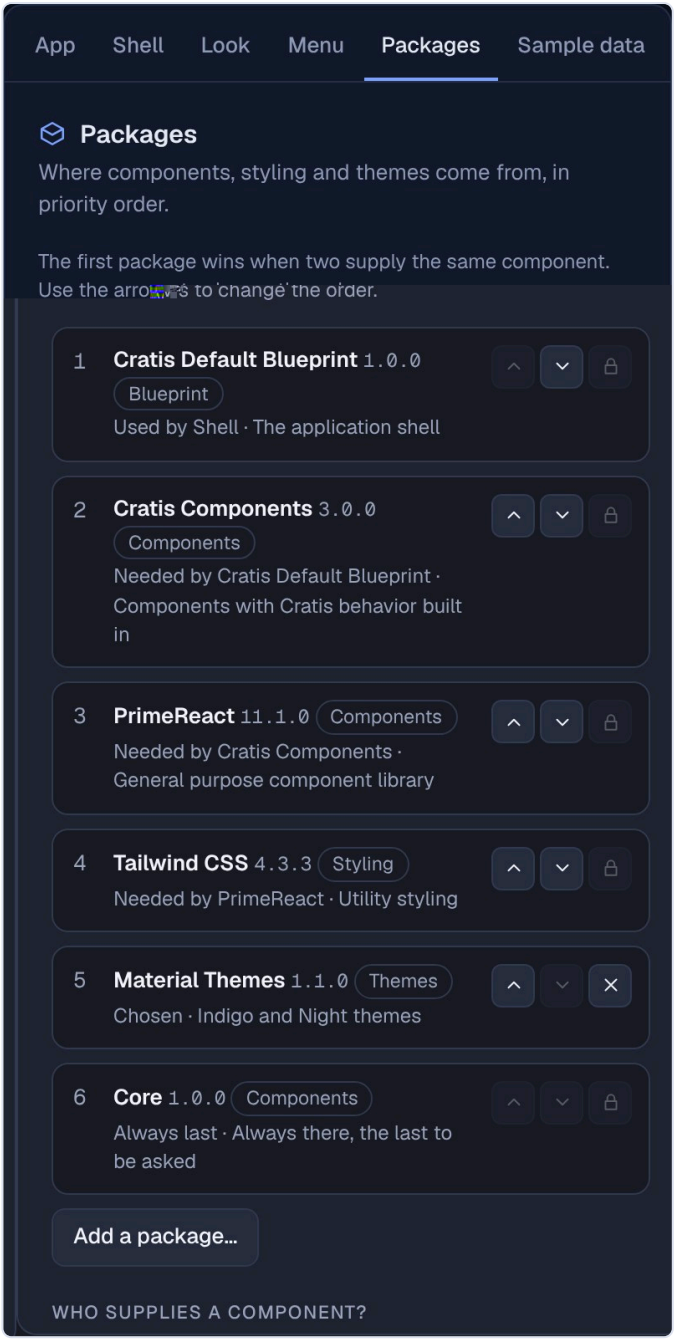


Figure 26. Packages after choosing Material Night: Material Themes appears as a removable, user-chosen package.

7. Menu section

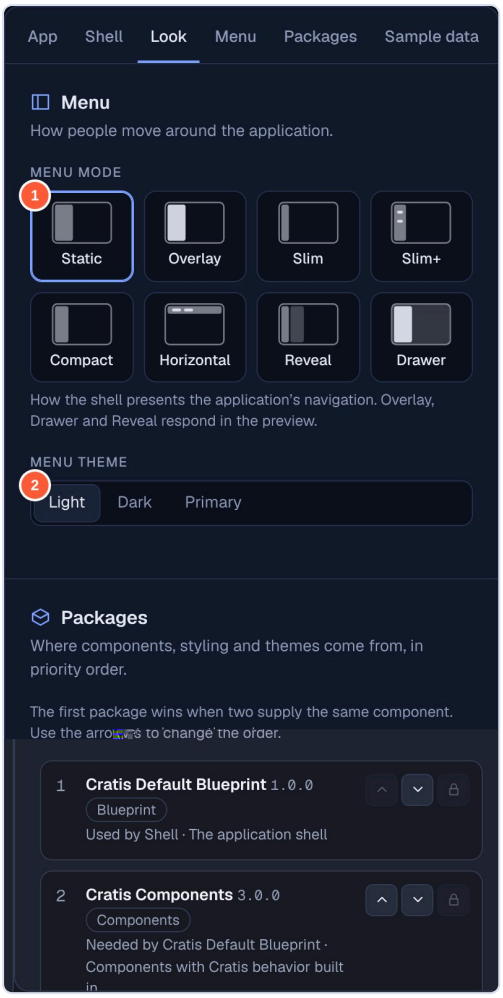

Menu mode and menu theme

Eight cards, each with a small schematic of where the menu sits. The selected mode has a blue border.

Menu theme (Light / Dark / Primary) sets the colour of the menu surface. Primary uses the accent colour.

Overlay, Drawer, Reveal and the mobile view respond to clicks and hover in the preview, so you can feel them rather than imagine them.

Markers: 1 menu mode cards, 2 menu theme control.

MODE	WHAT YOU SEE IN THE PREVIEW
Static	240 px sidebar, always visible. The Cratis Default Blueprint uses it.
Overlay	Menu hidden. The hamburger slides it over the content with no dimming.
Slim	68 px rail with icons only. The Minimal Blueprint uses it.
Slim+	92 px rail with an icon and a small label under it.
Compact	190 px sidebar with tighter rows and smaller type.
Horizontal	Items sit in the top bar and the sidebar disappears. The Dashboard Blueprint uses it.
Reveal	Slim rail that expands to the full menu while you hover it.
Drawer	Menu hidden. The hamburger opens it with a dimmed scrim; clicking the scrim closes it.

All eight modes

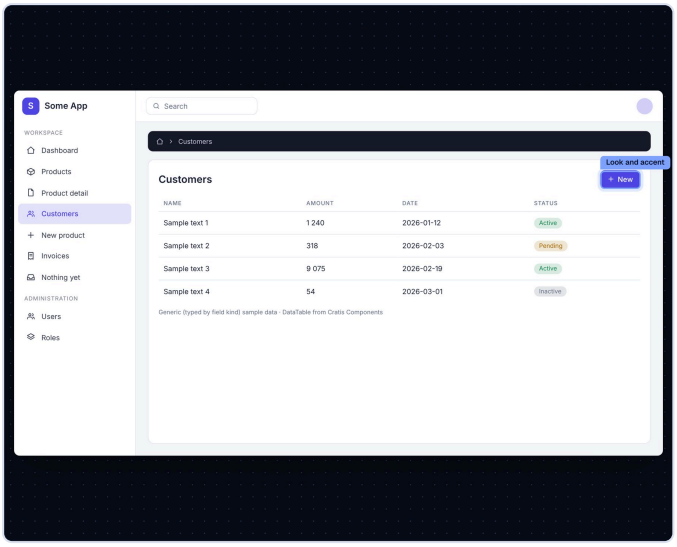


Figure 27. Static

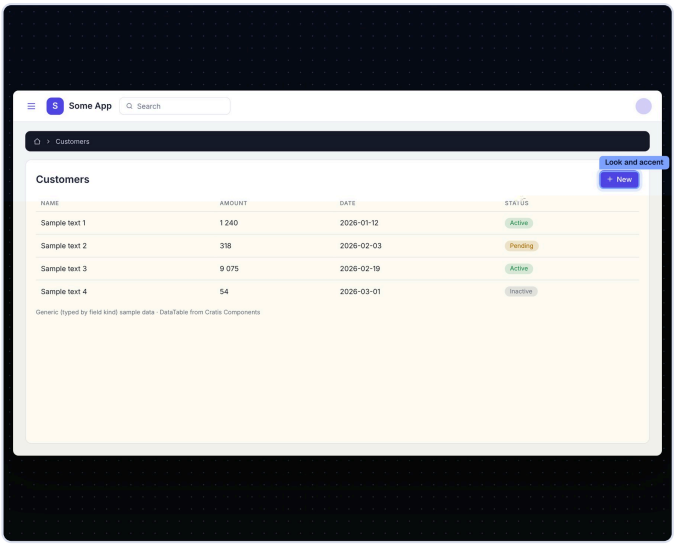


Figure 28. Overlay (closed)

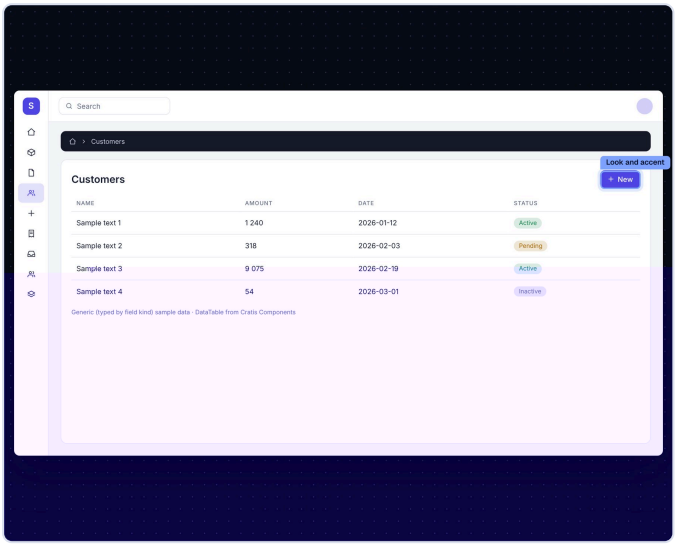


Figure 29. Slim

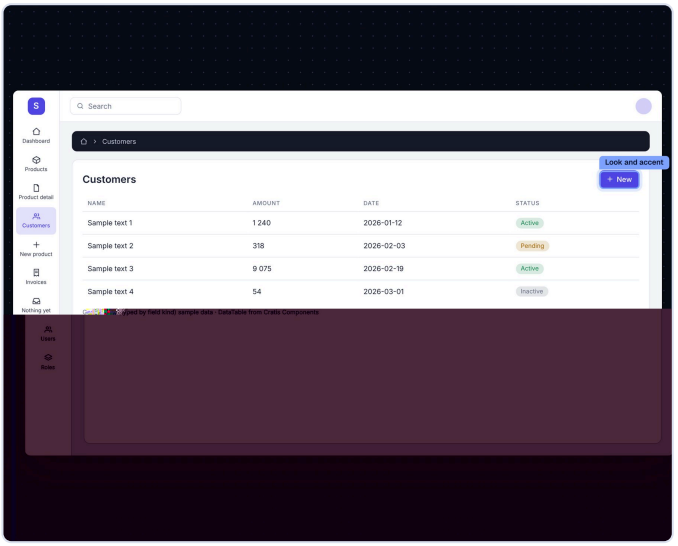


Figure 30. Slim+

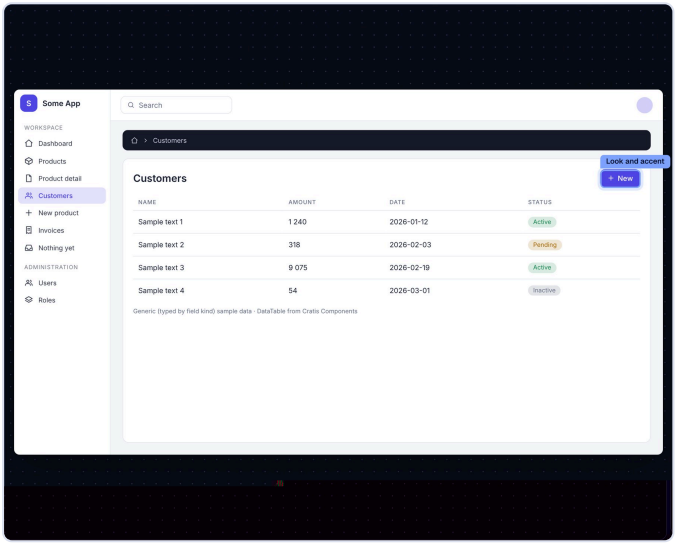


Figure 31. Compact

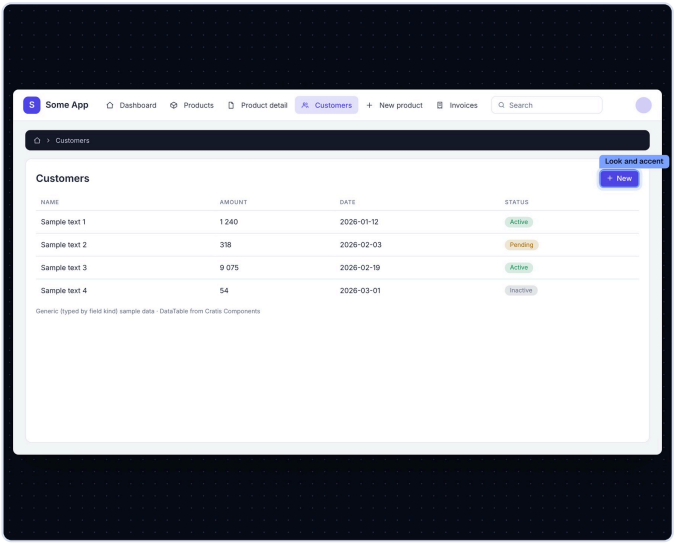


Figure 32. Horizontal

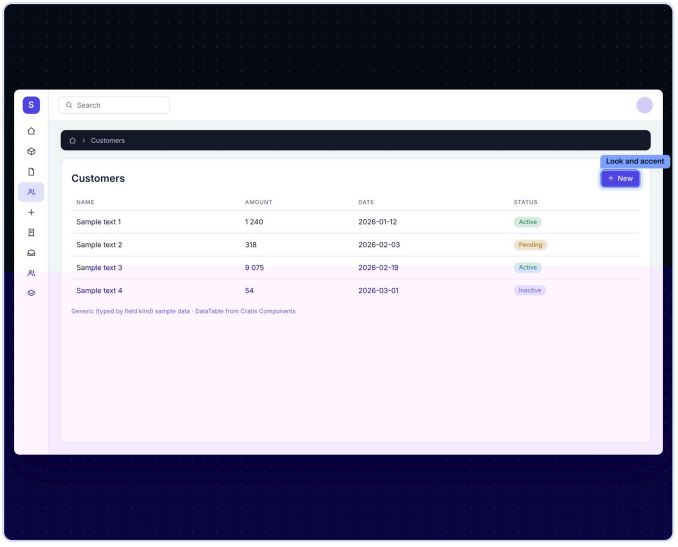


Figure 33. Reveal (not hovered)

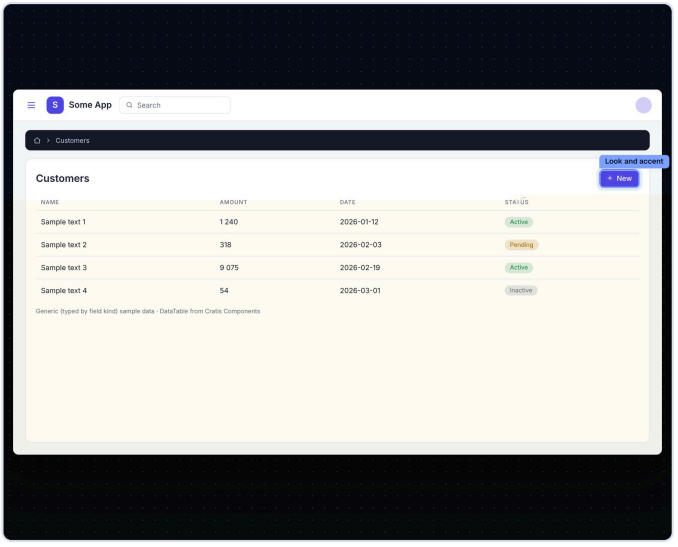


Figure 34. Drawer (closed)

Interactive states

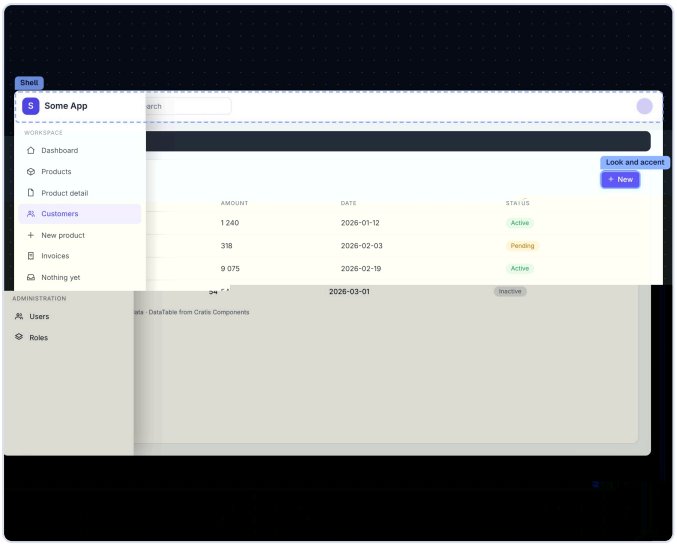


Figure 35. Overlay after clicking the hamburger. The menu floats over the content.

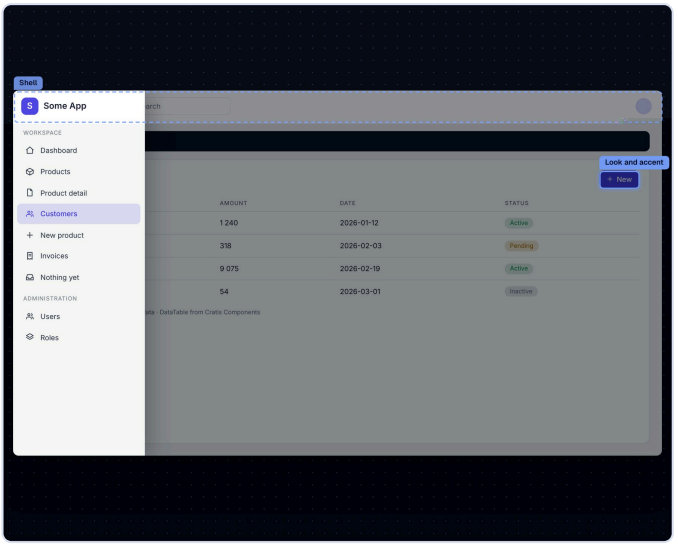


Figure 36. Drawer after clicking the hamburger. The scrim dims the content.

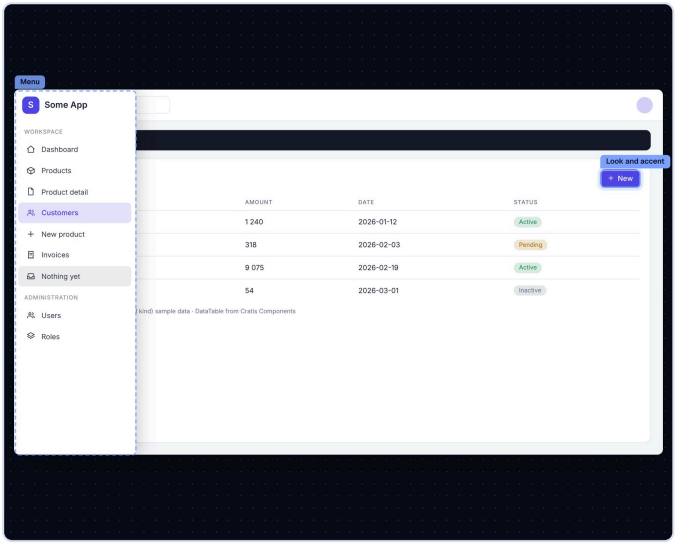


Figure 37. Reveal while hovered. The rail expands to full width. The dashed outline is the hover label.

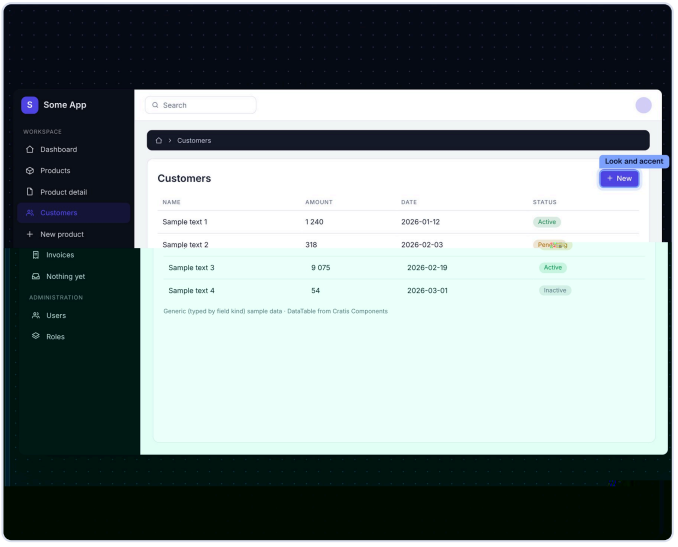


Figure 38. Menu theme: Dark.


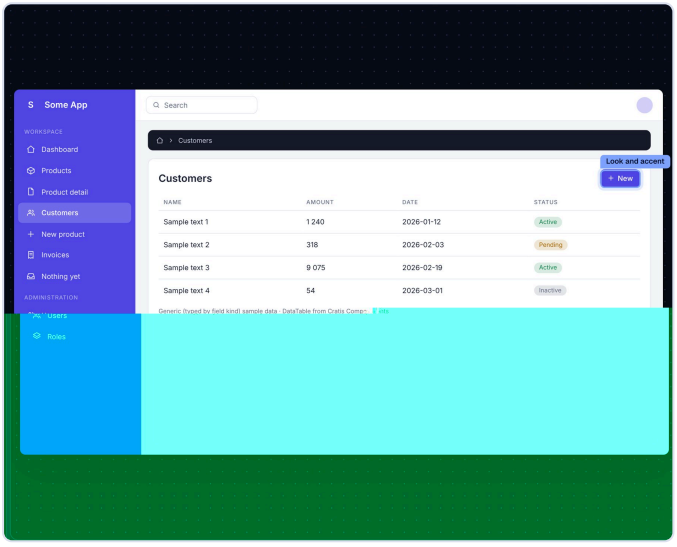


Figure 39. Menu theme: Primary. The menu takes the accent colour.

8.

Pack hemes s s
high s t' t

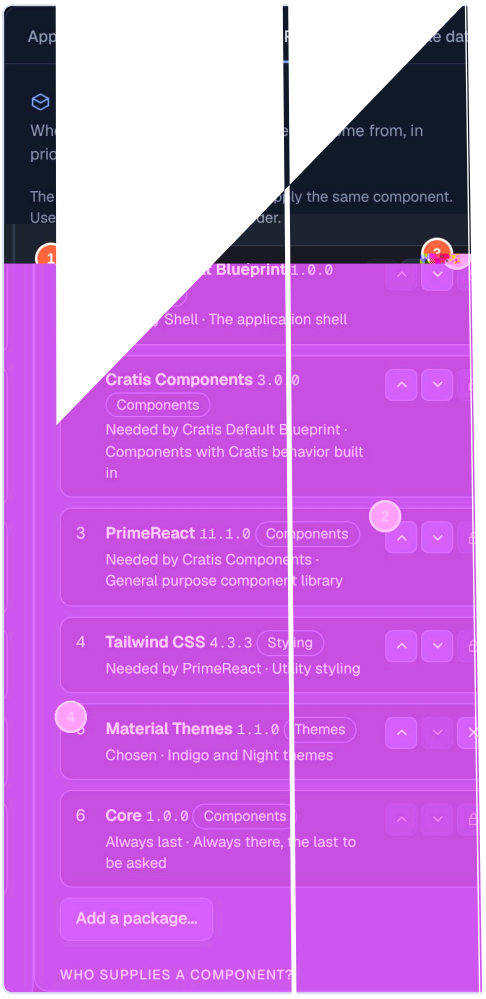

remove,

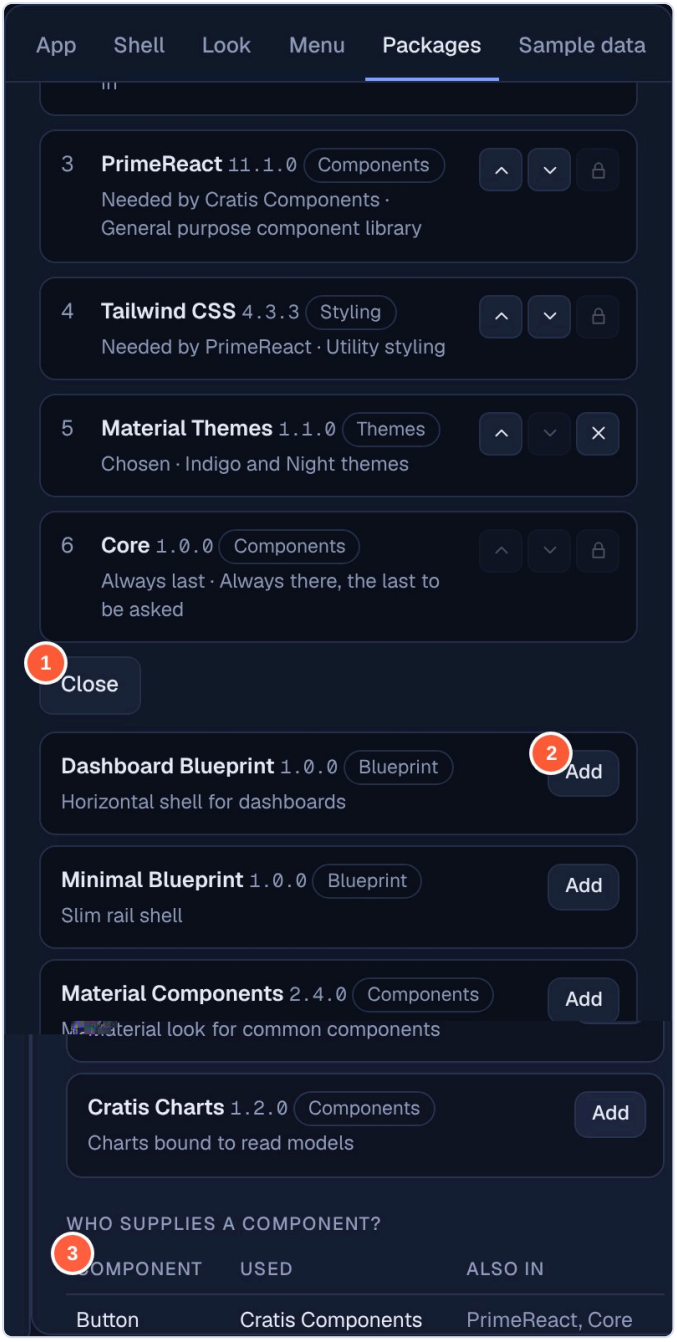


Figure 40. 1 "Add a package…" toggle, 2 Add button, 3 supplier table. The button opens a list of available packages. Each says what else it will add, for example Material Components also adds Tailwind if missing. Packages are inserted just above Core.

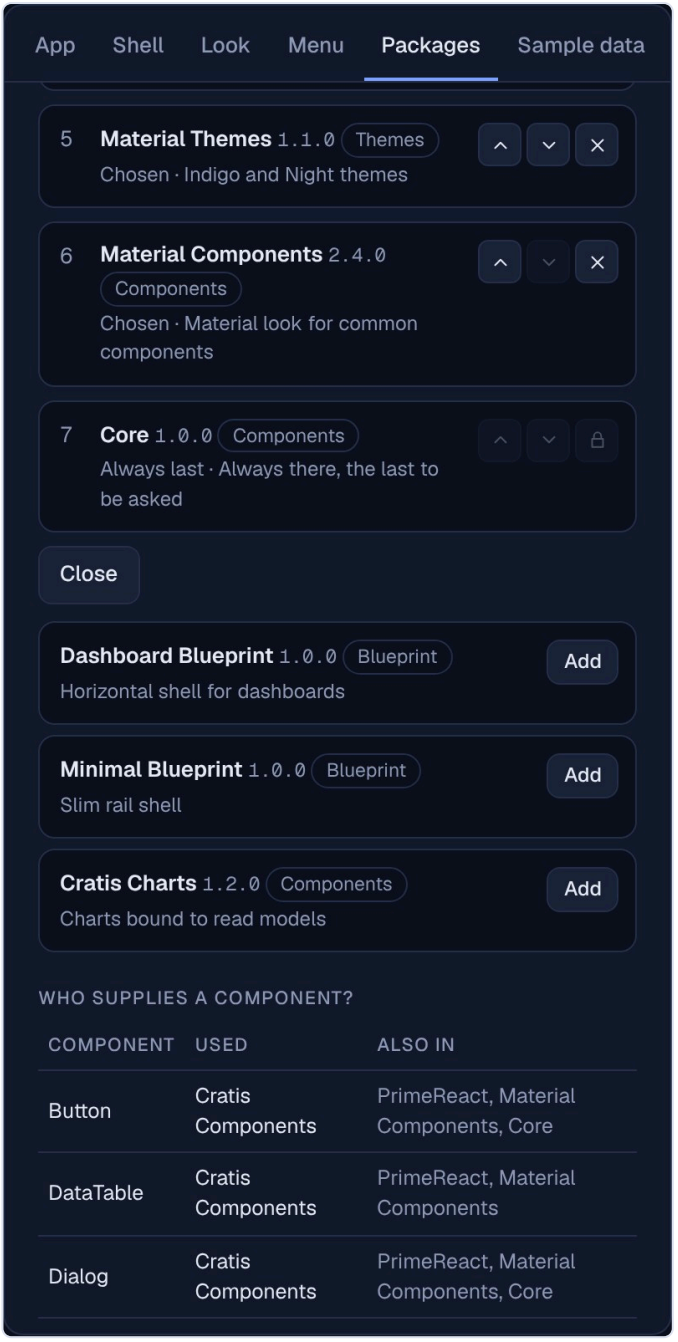


Figure 41. After adding Material Components, the "Who supplies a component?" table lists, per component, the winning package and the others that also supply it.


Order changes the result, and you can see it



Figure 42. After moving PrimeReact above Cratis Components, the caption under the table reads “DataTable from PrimeReact”. It changed from Cratis Components.

The caption in the content card always names the package that currently supplies the data table, so reordering has a visible effect in the preview.

9. Sample data section

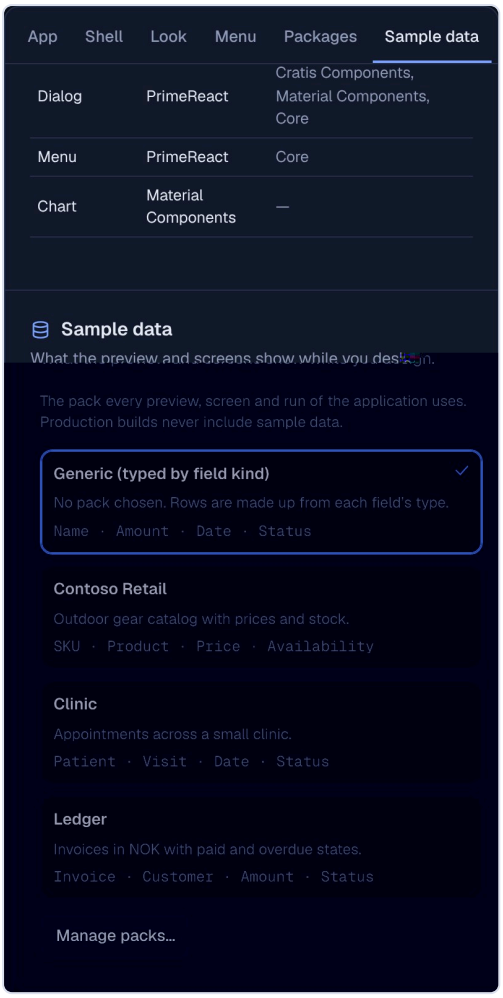

Packs

The pack every preview, screen and run uses while you design. The help text says production builds never include sample data.

- **Generic (typed by field kind)**: made-up rows from each field's type. This is the default.
- **Contoso Retail**: SKU, Product, Price, Availability.
- **Clinic**: Patient, Visit, Date, Status.
- **Ledger**: Invoice, Customer, Amount, Status, in NOK.

Each card lists its column names. The chosen card has a check. Status cells become coloured pills: green for good states, amber for pending, red for failed or overdue, grey otherwise.

Manage packs... is a placeholder button.

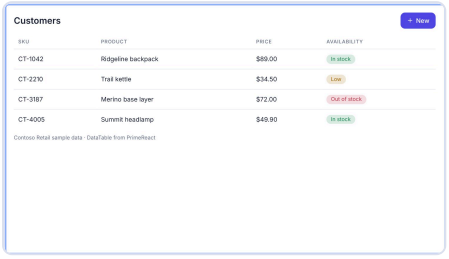


Figure 43. Contoso Retail

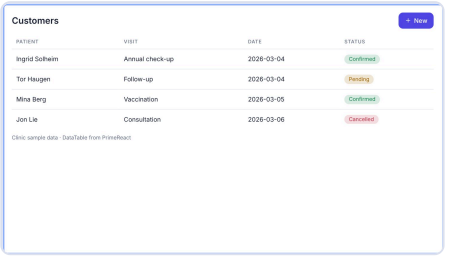


Figure 44. Clinic

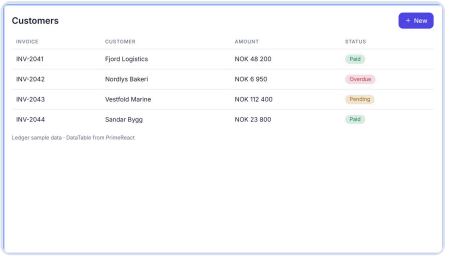


Figure 45. Ledger

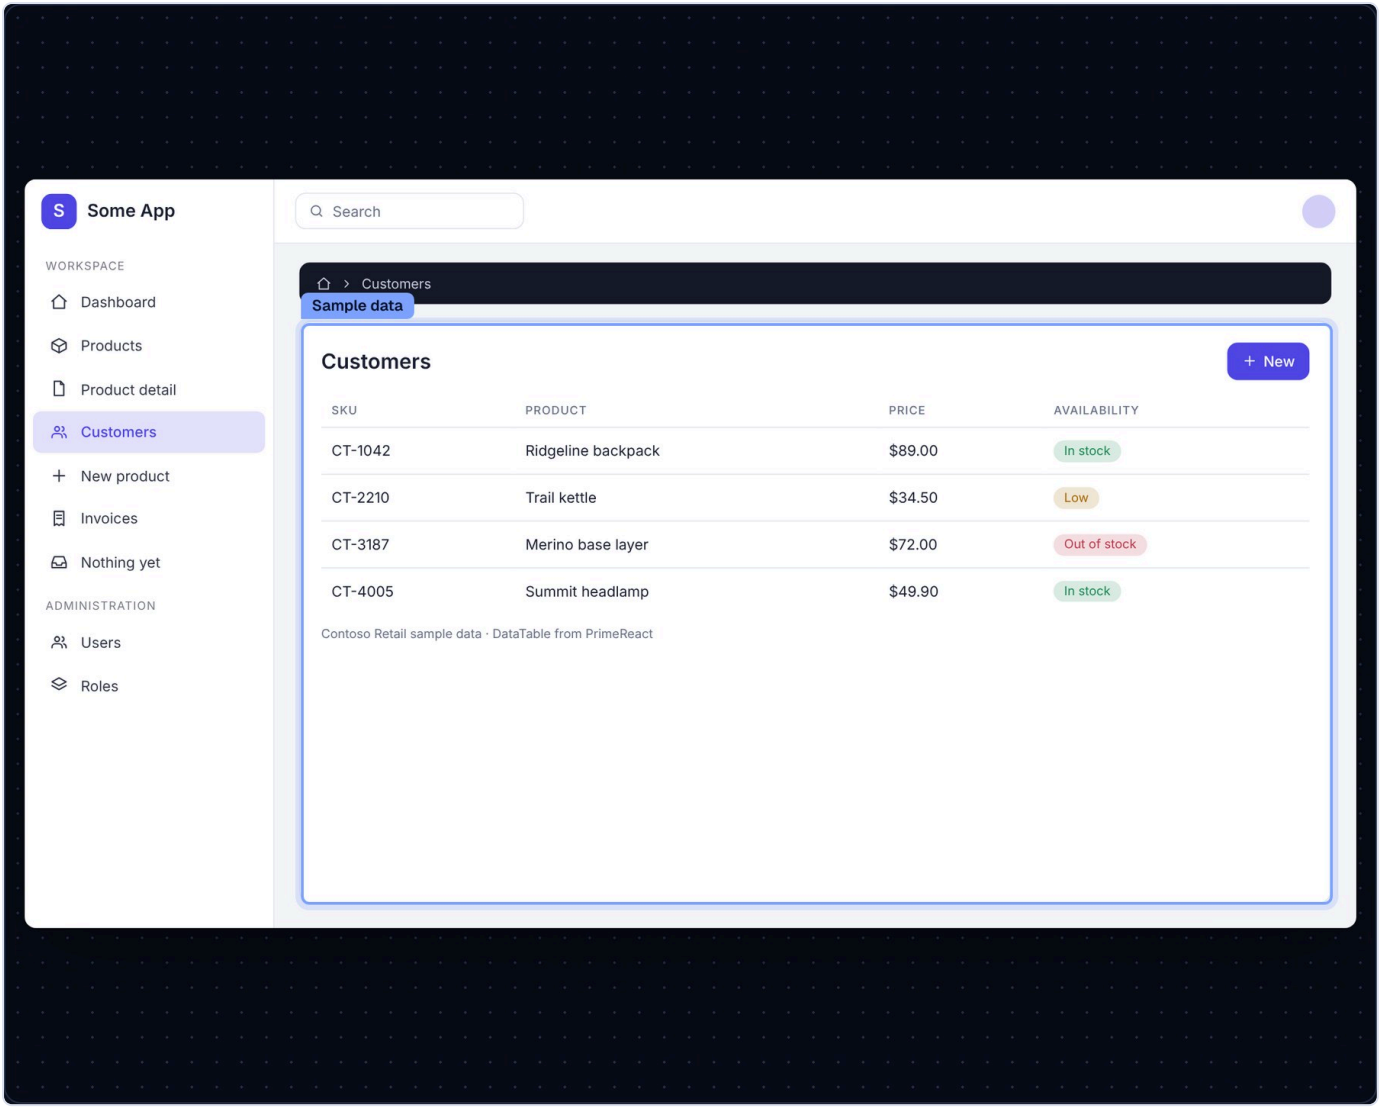


Figure 46. The full preview with the Contoso Retail pack selected.

10. Problems panel and status bar

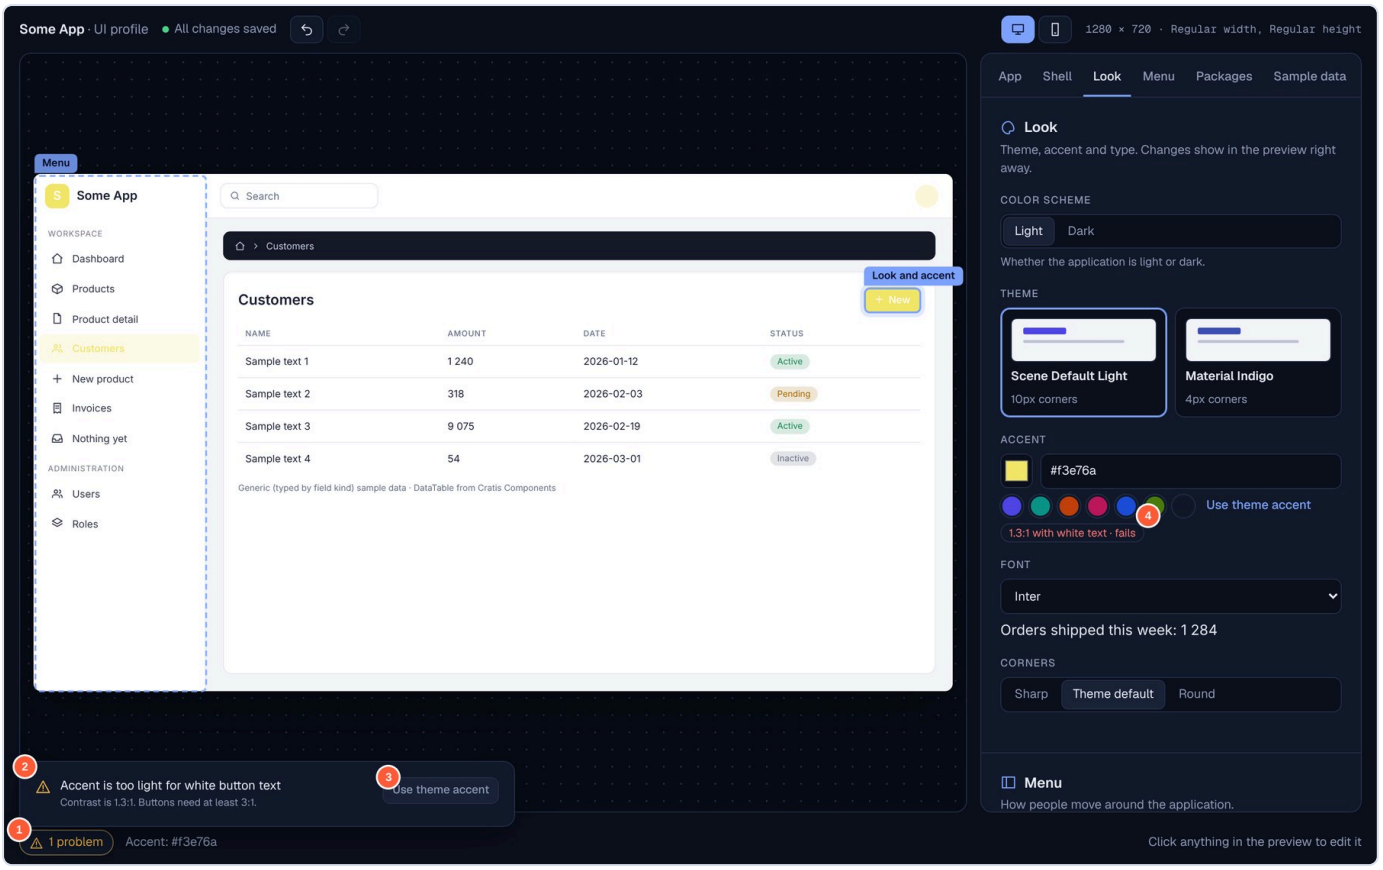


Figure 47. An accent that is too light. 1 problems chip, 2 the panel, 3 the fix button, 4 the red contrast chip in the inspector.

The bottom bar has three parts: the **problems chip**, the **status message**, and a hint on the right (“Click anything in the preview to edit it”). The chip is green with a check when all is well, and amber with a count when there are problems. Clicking an amber chip opens a panel above it. Each row has an icon, a title, one explanatory line and a button that jumps to the right section and applies the fix.

PROBLEM	WHEN IT APPEARS	FIX BUTTON
Theme needs a package	The selected theme comes from a package that is not in the list, for example after removing Material Themes.	Add package
Accent too light	Contrast with white button text is below 3:1.	Use theme accent
Own shell has no value	“My own shell” is chosen and the path field is empty.	Use default blueprint
Reveal needs hover	Information, not an error: the mobile preview is on while the Reveal mode is selected.	Switch to Drawer



Figure 48. The status bar in its calm state.

11. Device preview, undo and redo

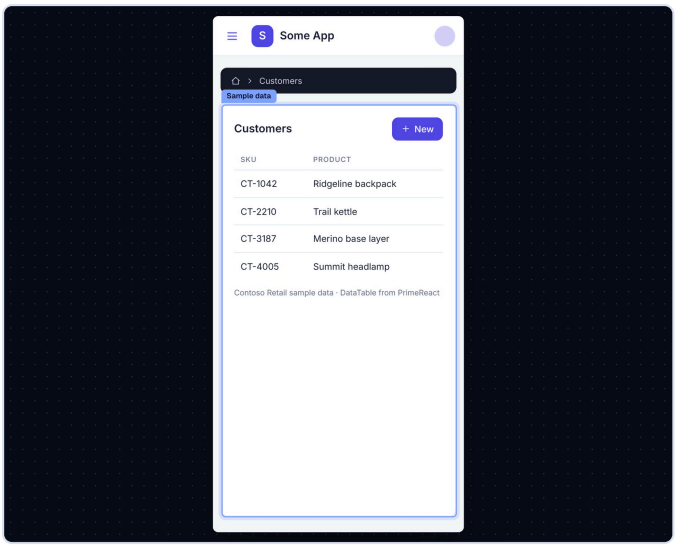


Figure 49. Mobile preview (390 × 800). The menu becomes a hamburger, search is hidden and the last two table columns drop away.

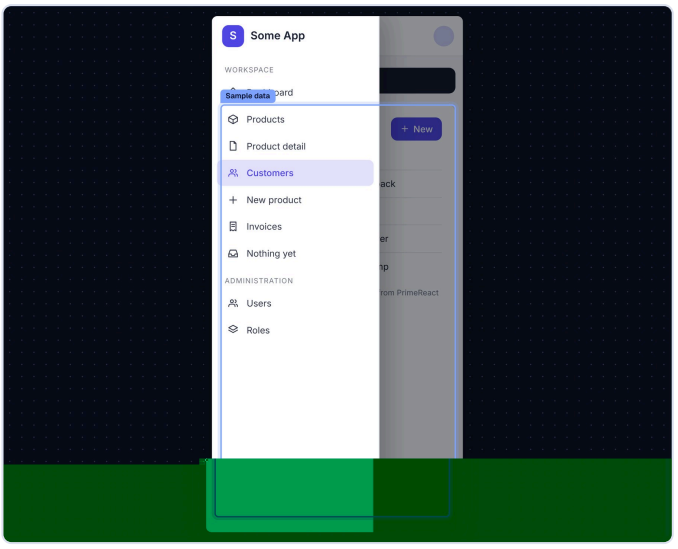


Figure 50. Mobile with the menu open: a drawer with a scrim, whatever menu mode is chosen.

Undo and redo



Figure 51. After three menu changes and two undos. 1 undo, 2 redo (now active), 3 the status line says what was undone.

- Every change in the inspector is one step with a readable label such as “Menu mode: Slim” or “Added Material Components”.
- Typing a name or dragging the colour picker is merged into one step when edits come within about one second of each other.
- Making a new change after undoing clears the redo stack.
- Preview-only actions are not in the history: opening a menu, switching screens, switching device, opening the problems panel.
- Shortcuts: `Ctrl/⌘ Z` undoes, `Ctrl/⌘ Shift Z` redoes. They are ignored while a text field or dropdown has focus so normal text undo still works.

Studio follows your system theme

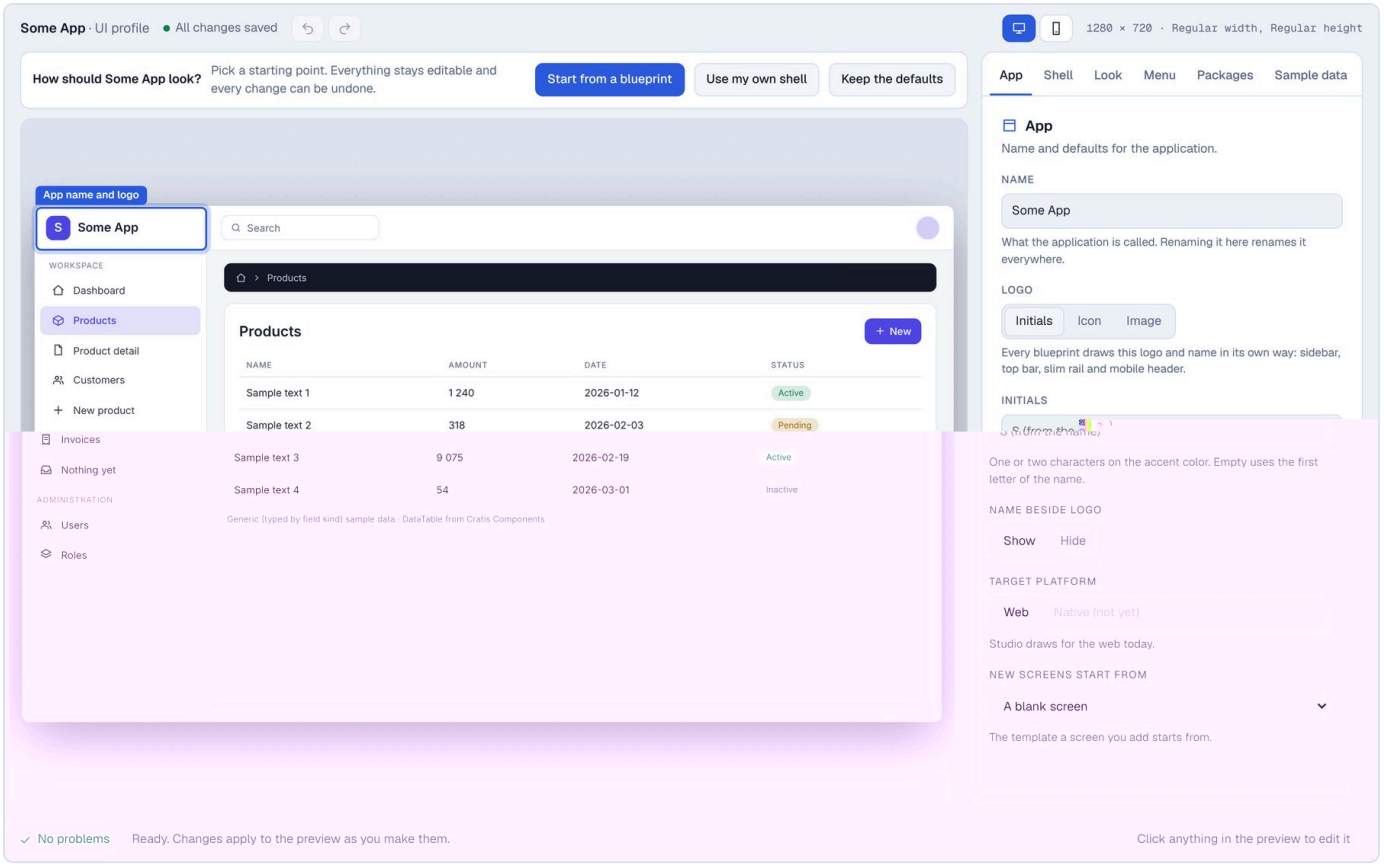


Figure 52. The editor chrome in light mode. The previewed application has its own scheme, set in Look, and does not follow the system.

12. Widget reference

Every control in the editor, what it looks like and what it does.

WIDGET	WHERE	LOOKS LIKE	DOES
Undo / Redo buttons	Header	Rounded icon buttons. Dim when unavailable.	Step through the change history.
Saved indicator	Header	Green dot with “All changes saved”.	Shows state. In the prototype it is always saved.
Device toggle	Header	Two icon buttons, active one filled blue.	Desktop 1280 × 720 or mobile 390 × 800 preview.
Size readout	Header	Monospace text.	Logical size and size class.
Starter bar	Above preview	Panel with one primary and two secondary buttons.	Choose how to begin; hides itself afterwards.
Hover outline	Preview	Dashed blue outline with a label tab.	Previews what a click would select.
Selection outline	Preview	Solid blue outline, glow, label tab.	Marks the region the active section controls.
Preview menu items	Preview	Icon and label rows.	Change the screen shown; select Menu.
Hamburger	Preview	Three-line icon in the top bar.	Opens and closes Overlay, Drawer and mobile menus.
Scrim	Preview	Dark layer behind an open drawer.	Click to close the menu.
Section tabs	Inspector	Text tabs, active one underlined.	Jump to a section; follow scroll position.
Section flash	Inspector	Brief blue tint on a section.	Shows where you landed after a jump.
Text field	App, Shell, Look	Dark input with a blue focus ring.	App name, own shell path, accent hex. Commits on Enter or blur.
Logo type control	App	Segmented: Initials, Icon, Image.	Chooses how the logo is made. Controls below change with it.
Initials field	App	Short text field, two characters.	Letters on the accent block. Placeholder shows the fallback letter.
Icon grid	App	Eight square icon buttons; chosen one outlined.	Picks the logo icon.
Choose image…	App	Secondary button; opens the file chooser.	Loads your own logo image, up to 400 KB.
Use sample logo	App	Secondary button.	Loads a built-in mark so you can try an image logo.

Logo thumbnail and Remove	App	Small framed preview and a blue link.	Shows the loaded image; Remove clears it.
Name beside logo	App	Segmented: Show, Hide.	Shows or hides the name next to the mark.
Link to App	Shell	Blue text link in a note.	Jumps back to the App section.
Dropdown	App, Shell, Look	Native select with the same styling.	New screens template, version rule, font.
Segmented control	App, Look, Menu	Pill group; selected segment raised.	Platform, color scheme, corners, menu theme.
Selection card	Shell, Look, Menu, Data	Bordered card; selected one has a blue border and a check.	Blueprint, theme, menu mode, sample pack.
Dimmed card	Look	Card at reduced opacity with a reason.	Theme whose package is missing; choosing it adds the package.
Wireframe thumbnail	Shell, Look	Small drawing of the layout or theme.	Shows the idea before you choose it.
Menu schematic	Menu	Tiny frame with a bar where the menu sits.	Shows each of the eight modes.
Colour picker	Look	Square swatch button.	Pick any accent colour; updates live.
Accent swatches	Look	Seven circles; selected has a ring.	One-click accent.
“Use theme accent” link	Look	Blue text link.	Clears the custom accent.
Contrast chip	Look	Pill with a ratio and a grade; green, amber or red.	Tells you whether white button text is readable.
Font sample	Look	One line in the chosen face.	Preview of the typeface.
Version chip	Shell	Green pill “Up to date”.	Version status of the blueprint.
Placeholder buttons	Shell, Data	Secondary buttons with an ellipsis.	Show a note in the status line; not built yet.
Package card	Packages	Number, name, version, kind chip, reason.	One entry in the priority list.
Up / Down / Remove	Packages	Small square icon buttons; lock replaces ×.	Reorder or remove; locked ones explain why.
Add a package…	Packages	Button that opens an inline list.	Add a package with its dependencies.
Supplier table	Packages	Three-column table.	Which package wins each component.
Problems chip	Status bar	Green check pill or amber warning pill.	Opens the problems panel.
Problems panel	Status bar	Floating list above the chip.	Titles, explanations and fix buttons.
Status message	Status bar	Plain text.	Last change, undo or redo note, or hint.

13. Rules the prototype enforces

- The app name and logo are set once under App. Every blueprint and menu mode draws them; switching blueprint never changes them.
- Initials are limited to two characters; empty falls back to the first letter of the name. Logo images are limited to 400 KB.
- Choosing the Image type without an image raises a problem and shows a dashed empty box.
- The package list always ends with Core, and Core cannot be moved or removed.
- A package that another package needs cannot be removed. The lock explains which one needs it.
- The blueprint package for the current shell cannot be removed while it is the shell.
- Adding a package also adds anything it depends on, and places them just above Core.
- Choosing a blueprint removes the previous blueprint package and sets the menu mode to that blueprint's default.
- Choosing a theme that needs a missing package adds that package. Removing the package later raises a problem instead of silently changing the theme.
- Switching color scheme moves to the matching Scene Default theme if the current theme belongs to the other scheme.
- A blank accent means "use the theme's accent". The accent always shows its contrast with white text.
- A hex field accepts three- or six-digit colours; anything else shows a message and changes nothing.
- The preview always shows the active sample pack, and the table caption names the package that supplies the data table.

14. What this is not yet, and open questions

Not built, on purpose

- Cropping or resizing logo images, a favicon or app icon, and separate light and dark logo variants.
- Real package resolution, versions and downloads: the catalog is invented.
- Per-screen overrides, nested menus, a screen list, fonts you upload yourself.
- The "Copy to my templates", "Create new shell" and "Manage packs" actions.
- Saving: the "All changes saved" label is static and reloading resets the profile.
- The preview is a stand-in application, not rendered by the real components.

Names and content to replace

The blueprint names, the Material and Charts packages, the Retail, Clinic and Ledger packs and the font list are placeholders I invented to make the prototype feel real. Swap in the real catalog.

Questions for the next iteration

- Is "click the preview, edit in one inspector" enough, or do you also want a structure tree for per-screen settings later?
- Should a blueprint own the menu mode, as it does here, or only suggest a default the user can keep?
- How prominent should package order be? It is in the main flow now. It could sit behind an advanced section.
- Does a logo need separate light and dark versions, and a mark-only version for slim menus, or is one image enough?
- Should the same logo also produce the favicon and the app icon for installs?

- Should the problems chip also block publishing, or stay advisory?
- Where should the choice of design system and fonts live when apps have more than one theme?

> **Fixes made while writing this document.** The Horizontal menu mode left the mobile preview with no way to open the menu; clicking in the preview made the selection jump through sections while the inspector scrolled; and Overlay and Drawer showed no logo while closed. All three are fixed in the published prototype.